

HSF

NOTES:

Current Rating: 3AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -55°C to +105°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF (UL94V-0)

Ordering Information





3113-XX P XX B K00 X 1

No. of Pins
 10P 30P
 14P 34P
 16P 40P
 20P 50P
 24P 60P
 26P 64P

Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S4=15u"Gold/Tin
 S5=50u"Gold/Tin
 SN=Tin

Color Insulator
 B=Black
 U=Blue
 G=Gray(427C)
 E=Gray(413C)

Packaging:
 A=Tray
 T=Tube

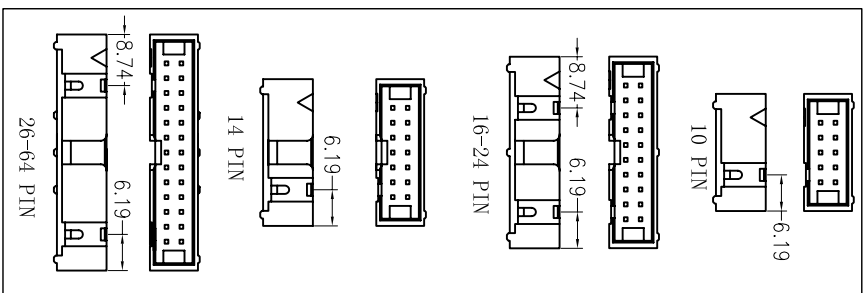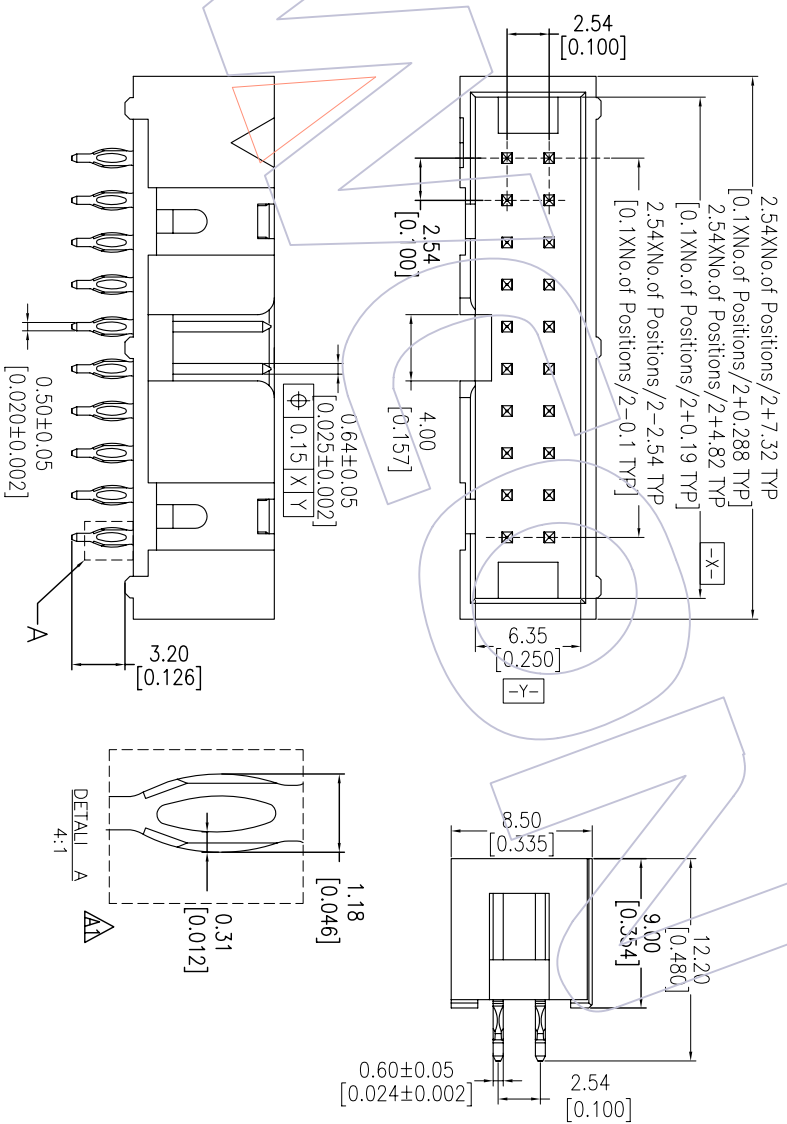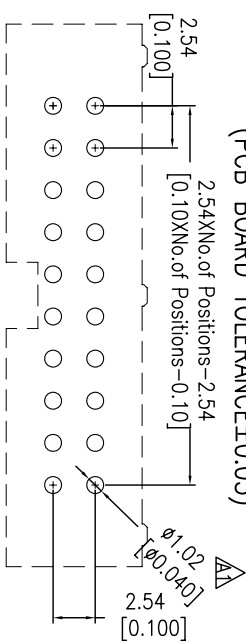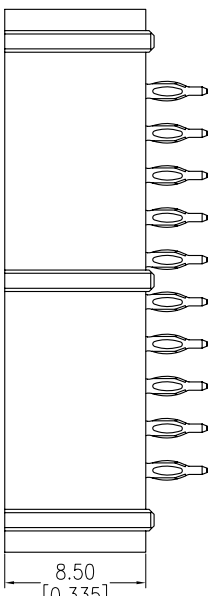

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2012/07/12	MODIFY PCB HOLE	
A0	2011/06/27	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
X.X	Tang	2012/07/12	UNIT	mm
X.XX	CHECK	DATE	SIZE	A4
X.XXX	±0.25	DATE	SHEET	1/1
Angle	APPROVE	DATE	PROJ.	
± 3'				

PART NO.	3113-XXPXXBK00X1
TITLE:	2.54PITCH BOX PRESS FIT TYPE
Customer NO.	

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com