

HSP

NOTES:
 Current Rating :0.5AMP
 Voltage Rating:50V AC/DC
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:800MΩ min Δ
 Contact Resistance:20mΩ Max
 Operation Temperature:-25°C to +85°C



Contact:Phosphor Bronze,Tin plated
 Housing:LCP UL94V-0




Ordering Information

5130-XX S D D N B T 0X

No. of Pins 06-30P
 Contact Type D=Double contact
 Color B=Black E=Orange T=Natural
 Packing Series No. T=Tray 01=Type 1 R=Reel 02=Type 2

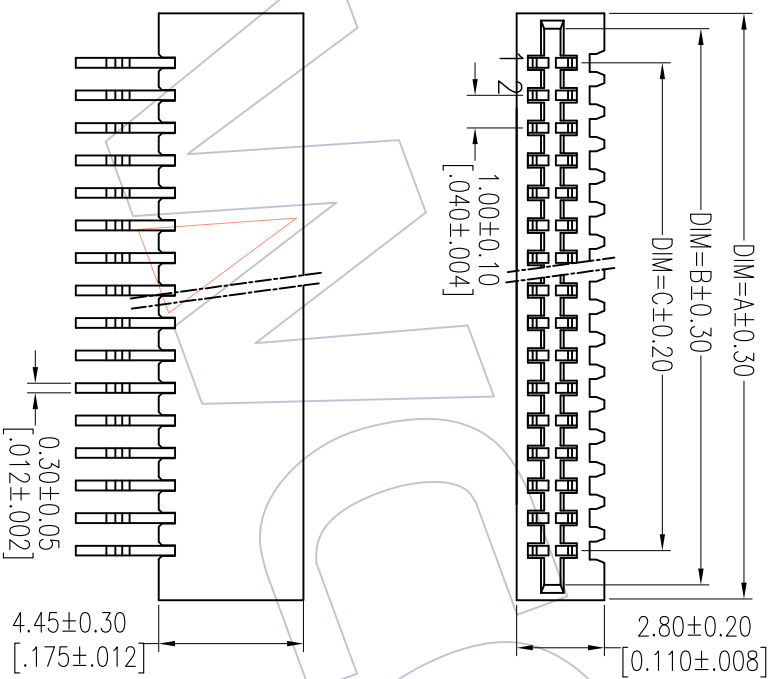

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

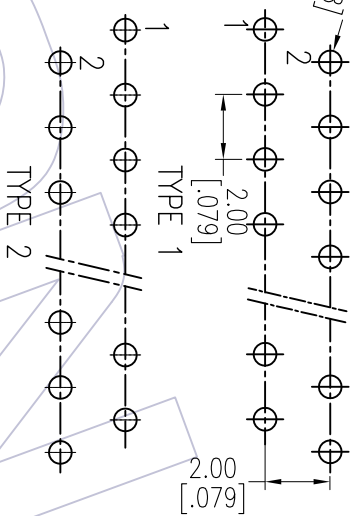

PIN	DIM=A	DIM=B	DIM=C
30P	32.0	31.10	29.00
29P	31.0	30.10	28.00
28P	30.0	29.10	27.00
27P	29.0	28.10	26.00
26P	28.0	27.10	25.00
25P	27.0	26.10	24.00
24P	26.0	25.10	23.00
23P	25.0	24.10	22.00
22P	24.0	23.10	21.00
21P	23.0	22.10	20.00
20P	22.0	21.10	19.00
19P	21.0	20.10	18.00
18P	20.0	19.10	17.00
17P	19.0	18.10	16.00
16P	18.0	17.10	15.00
15P	17.0	16.10	14.00
14P	16.0	15.10	13.00
13P	15.0	14.10	12.00
12P	14.0	13.10	11.00
11P	13.0	12.10	10.00
10P	12.0	11.10	9.00
9P	11.0	10.10	8.00
8P	10.0	9.10	7.00
7P	9.0	8.10	6.00
6P	8.0	7.10	5.00

A2	14/04/25	Modify The Housing Material:PBT--LCP Δ
A1	12/11/23	MODIFY THE NOTES:800mΩ min --- 800MΩ min
A0	12/07/04	NEW
REV	DATE	MODIFICATION DESCRIPTION

OPERATION	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3'
DIM	TOL

DRAW	JYHuang	DATE	2014/04/25
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.	5130-XXSSDDNXX0X
TITLE:	1. 06PC 180° DIP DOUBLE CONTACT H=2.8mm
Customer NO.	

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com