

HSF



NOTES:

Rated Current: 3.0AMP.
Rating Voltage: 250V AC/DC
Contact Resistance: 20mΩ Max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min.
Operation Temperature: -25°C to +85°C
Insulator Material: PA66 UL94V-0
Use with: WF2541-T
Mated with: WF2541-Wafer

Ordering Information

WF2541 - H XX X 0 1

No. of Pins Colour Packing
02-16P E= Beige 0= PE Bag

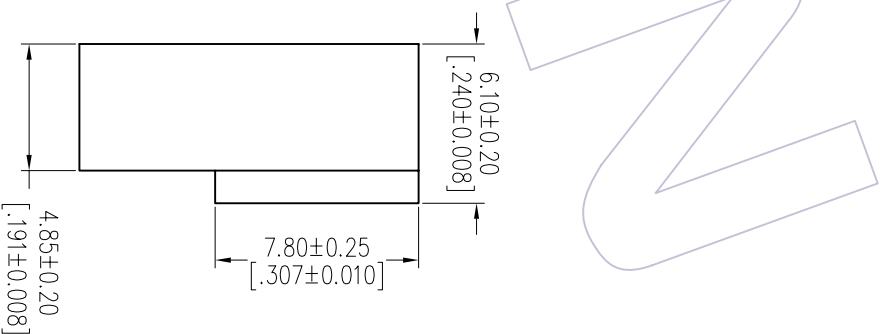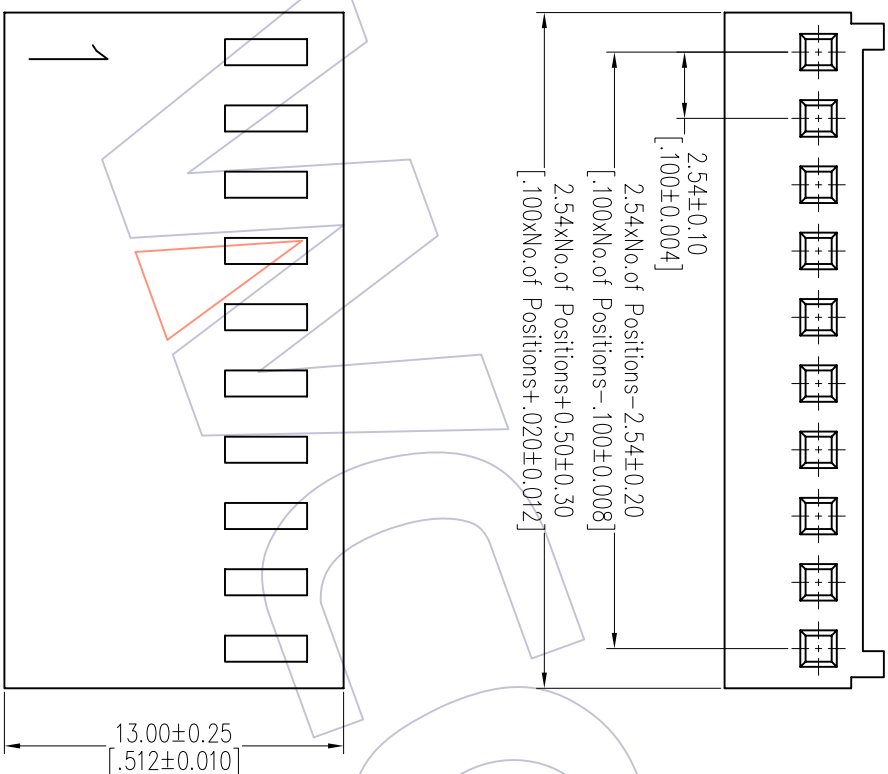

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	FIT	PART NO.	WCON-Dongguan	
AO	2012/09/07	NEW		XX ±0.40	UNIT	mm	WF2541-HXXX01	Http: www.wcon.com	
				X.XX ±0.25	CHECK	A4	TITLE:	WCON-Kunshan	
				X.XXX ±0.15	DATE	1/1	"M" TYPE 2.54mm Housing	Tel: +86 769 85358920	
				Angle ± 3°	APPROVE		Customer NO.	Tel: +86 512 57468408	
				DIM TOL	PROJ.			Fax: +86 769 85358915	
								E-mail: sales@wcon.com	
								E-mail: sales@wcon.com	

WCON

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com