HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PA9T+30%GF UL94V-0

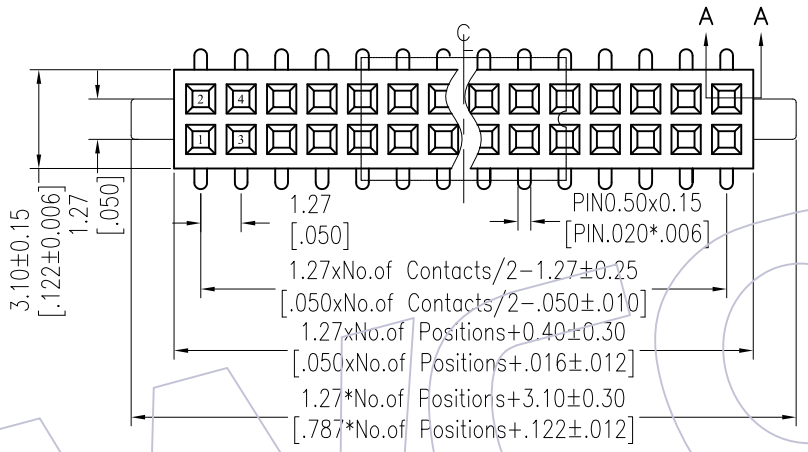

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

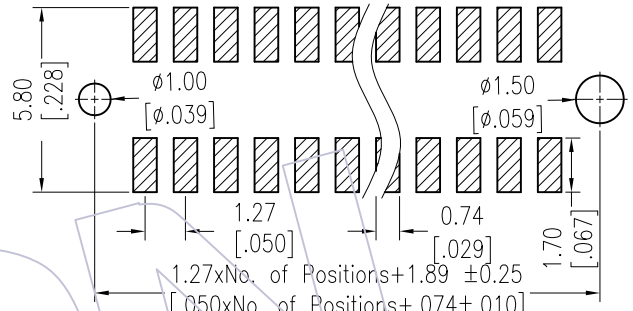



Special CAP for 2*2P,2*3P,2*4P

Ordering Information

2344-2 XX M XX CUN X 3

- XX: No.of Pins per Row: 02~50Pin
- XX: Contact Plating:
  G0=Gold Flash
  G3=10μ"Gold
  G4=15μ"Gold
  G5=30μ"Gold
  S0=Gold Flash/Tin
  S3=10μ"Gold/Tin
  S4=15μ"Gold/Tin
  S5=30μ"Gold/Tin
  SN=Tin
- X: Packing:
  T=Tube
  P=Tube+CAP
  R=Tape&Reel+CAP

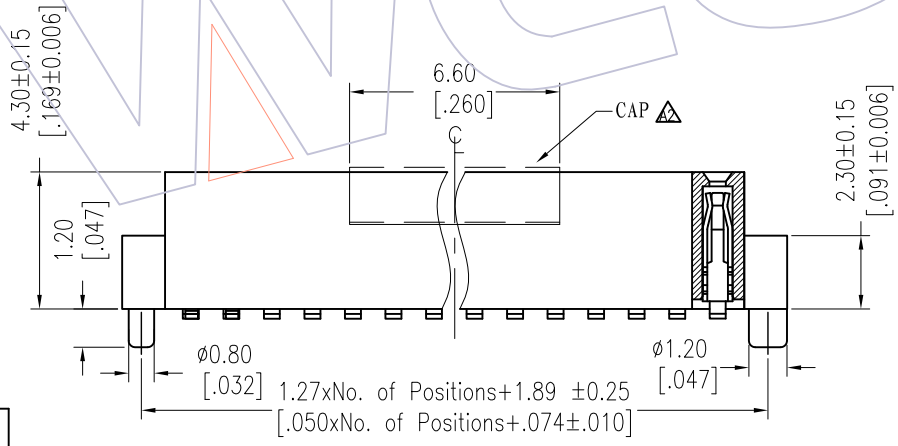

SECTION A−A

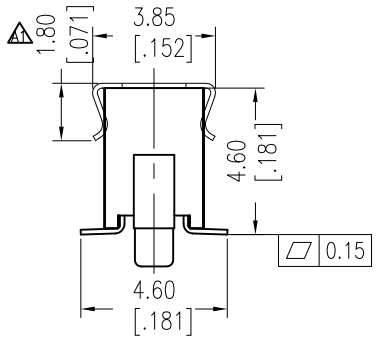

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3131/3133/3100
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2014/12/30	Modify CAP	------
A1	2013/08/21	Modify cap 2.00⟶1.80	------
A0	2012/07/09	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	Wang	2014/12/30
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 2344-2XXMXXCUNX3

TITLE: FH1.27mm DUAL SMT WITH DIFFERENT POST H=4.30

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com