



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
Contact plating: Au over Ni
Insulator Material: PA9T+30%GF UL94V-0

Ordering Information

2335-2 XX M XX CUN X I

- No. of Pins per Row: 02-50Pins
- Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin
- Packaging:
T=Tube
P=Tube+CAR&MYLAR
R=Reel+CAR&MYLAR

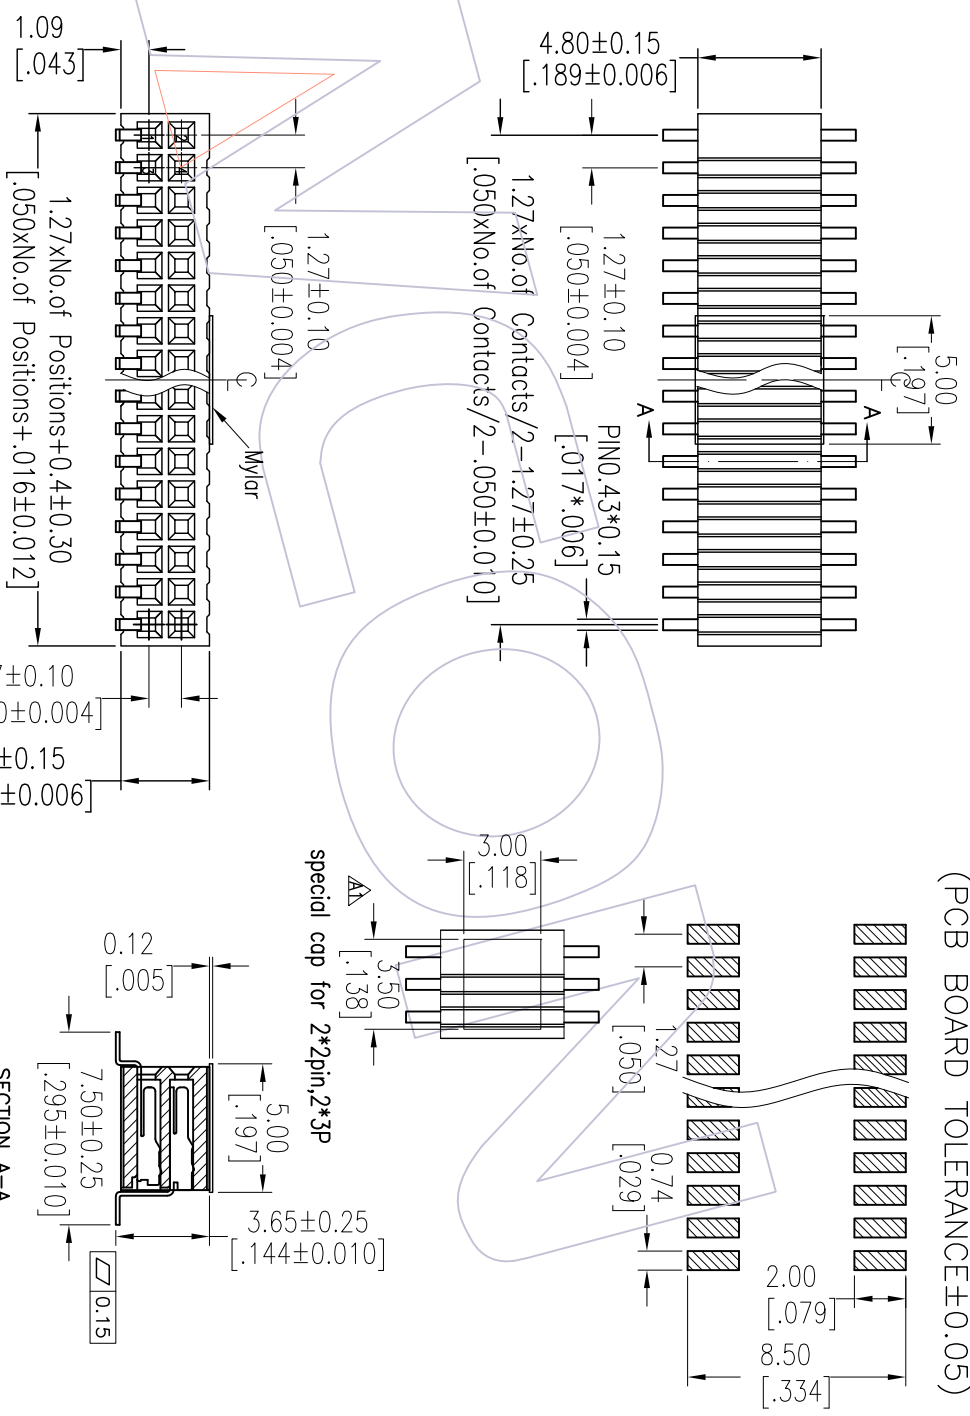

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	WANG		2014/08/08				2335-2XXMXXCUNX1	
CHECK		CHECK		DATE		SIZE		TITLE:	
X.XXX	±0.15					A4		FH1.27mm DUAL SIDE INSERT SMT	
ANGLE		APPROVE		DATE		SHEET		Customer NO.	
± 3'						1/1			
DIM		TOL		PROJ.		FIT		Customer NO.	
CHANGE		APPROVE		DATE		SHEET		Customer NO.	
MODIFICATION DESCRIPTION		APPROVE		DATE		SHEET		Customer NO.	
DATE		APPROVE		DATE		SHEET		Customer NO.	
NEW		APPROVE		DATE		SHEET		Customer NO.	
Modify Mylar		APPROVE		DATE		SHEET		Customer NO.	
2014/08/08		APPROVE		DATE		SHEET		Customer NO.	
2012/07/07		APPROVE		DATE		SHEET		Customer NO.	
NEW		APPROVE		DATE		SHEET		Customer NO.	
DATE		APPROVE		DATE		SHEET		Customer NO.	



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com