HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance:30mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ
Operation Temperature:−55℃~+105℃

Contact Material: Brass
Contact Plating: Au and Sn over Ni
Fixing Material: Phosphor Bronze
Fixing Plating: Sn over Ni
Insulator Material: PBT+30% G.F(UL94V-0)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

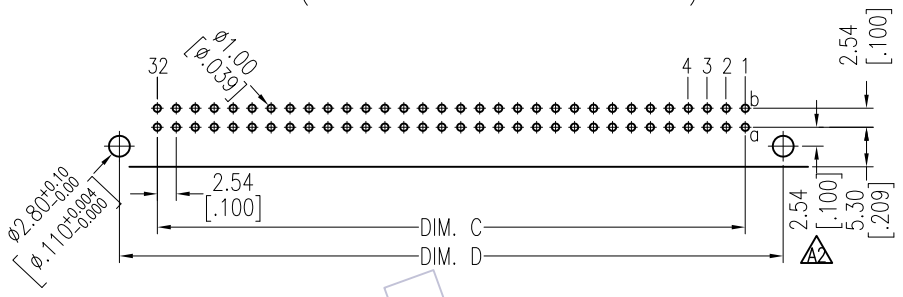

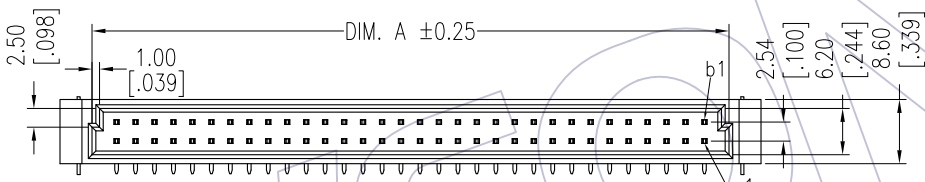



W: With Lock



N: Without Lock

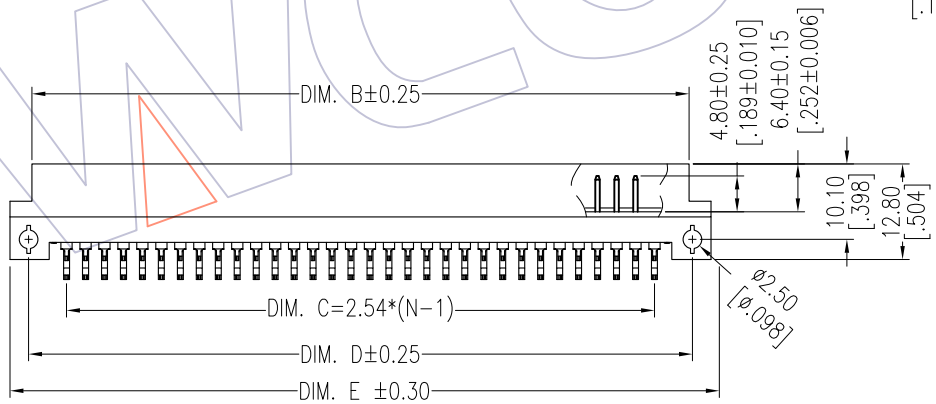

Ordering Information

3410-2 XX X MR SX X A X

- No.of Pins Per Row: 10pin, 16pin, 32pin
- Rows with Contacts: B=a+b, D=a
- Contact Plating: S0=Gold Flash/Tin, S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Packing: A=Tray
- W=With Lock, N=Without Lock
- DIP Length: 1: L=2.50, 2: L=3.00, 3: L=4.00, 4: L=4.57

B	64	2	32	85.20	88.00	78.74	88.90	94.00
B/2	32	2	16	44.56	47.36	38.10	48.26	53.36
B/3	20	2	10	29.32	32.12	22.86	33.02	38.12
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2015/06/04	Modify the P.C.B Layout	——
A1	2014/08/12	Modify the dim	——
A0	2014/05/29	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2015/06/04
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3410-2XXXMRSXXAX

TITLE: 2.54PITCH DIN 41612 Male 90° DIP(B-Type)

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com