HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 25mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 1000MΩ Min
Operation Temperature: −55℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PA66+30%G.F UL94V-0
Shell:Cold Roller Steel,Ni Plated
Revit/Harpoon:Brass,Sn Over Ni Plated

Print Date Code:

XX XX XX
Year Month Date

Ordering Information

6215- 15 F M N XX X 05

- 15 — No.of Pins
- F M — Product Type: M=With Revit Without Screw
- N — Plating
- XX — Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- X — Insulator Color: B:Black, U:Blue
- 05

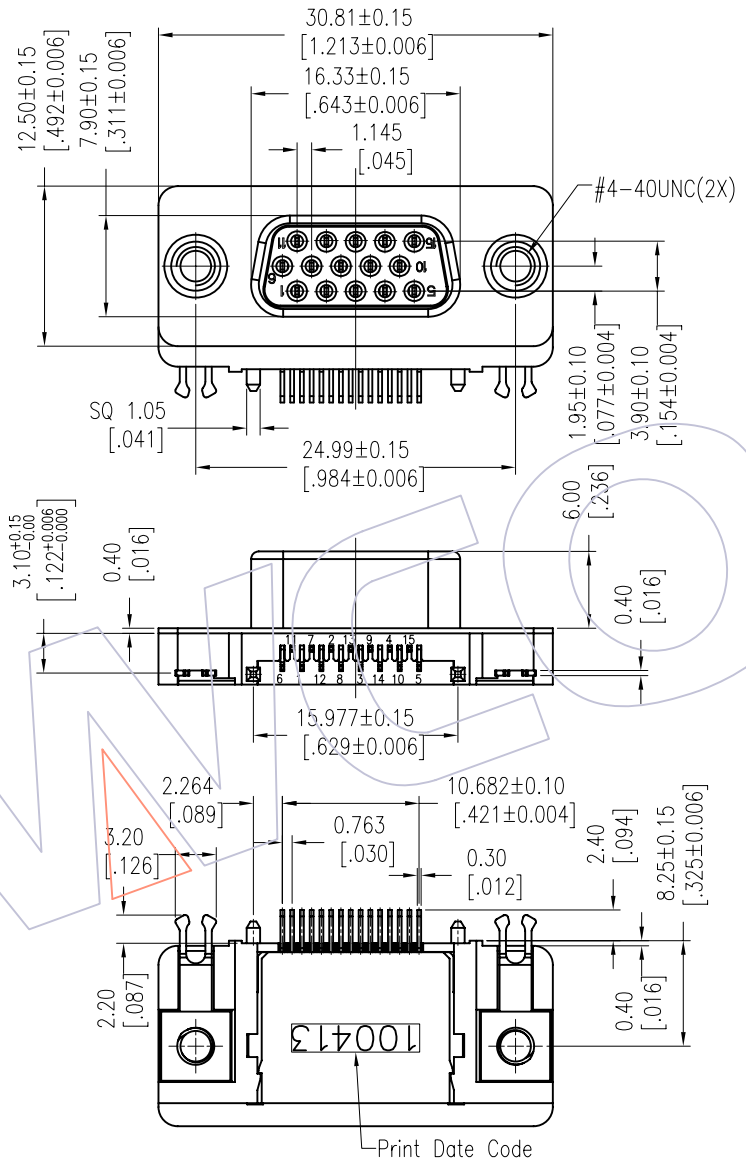

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

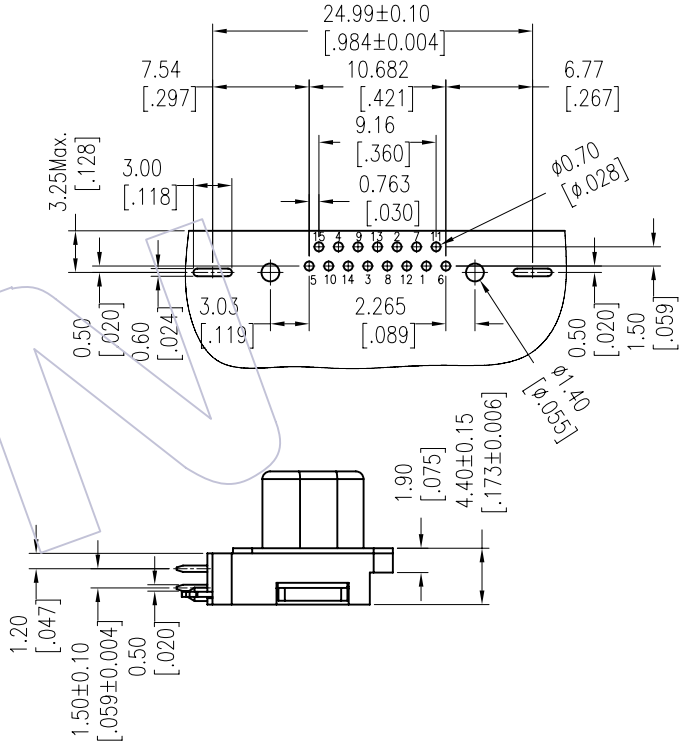

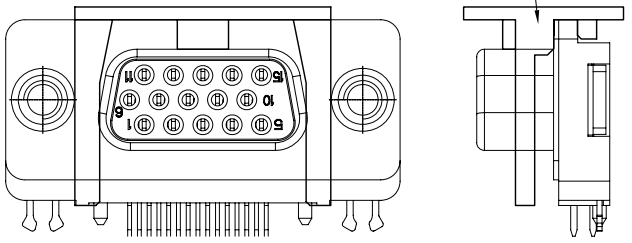

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/12/18	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/12/18
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 6215-15FMNXXX05

TITLE: SLIM HIGH D-SUB FEMALE 15P 90° DIP

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com