

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



NOTES:

- Current Rating: 3.0AMP
- Contact Resistance: 25mΩ Max
- Withstand Voltage: 500V AC/Minute
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -55°C to +105°C
- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA66+30%G.F UL94V-0
- Shell: Cold Roller Steel, Ni Plated
- Revit/Harpoon: Brass, Sn Over Ni Plated

Ordering Information

6215B-15 F M N S1 B 01

- No. of Pins 15P
- Product Type M=With Revit Without Screw
- Contact Plating S0=Gold Flash/Tin S3=10u"Cold/Tin S4=15u"Cold/Tin S5=30u"Cold/Tin SN=Thin
- Insulator Color B:Black U:Blue

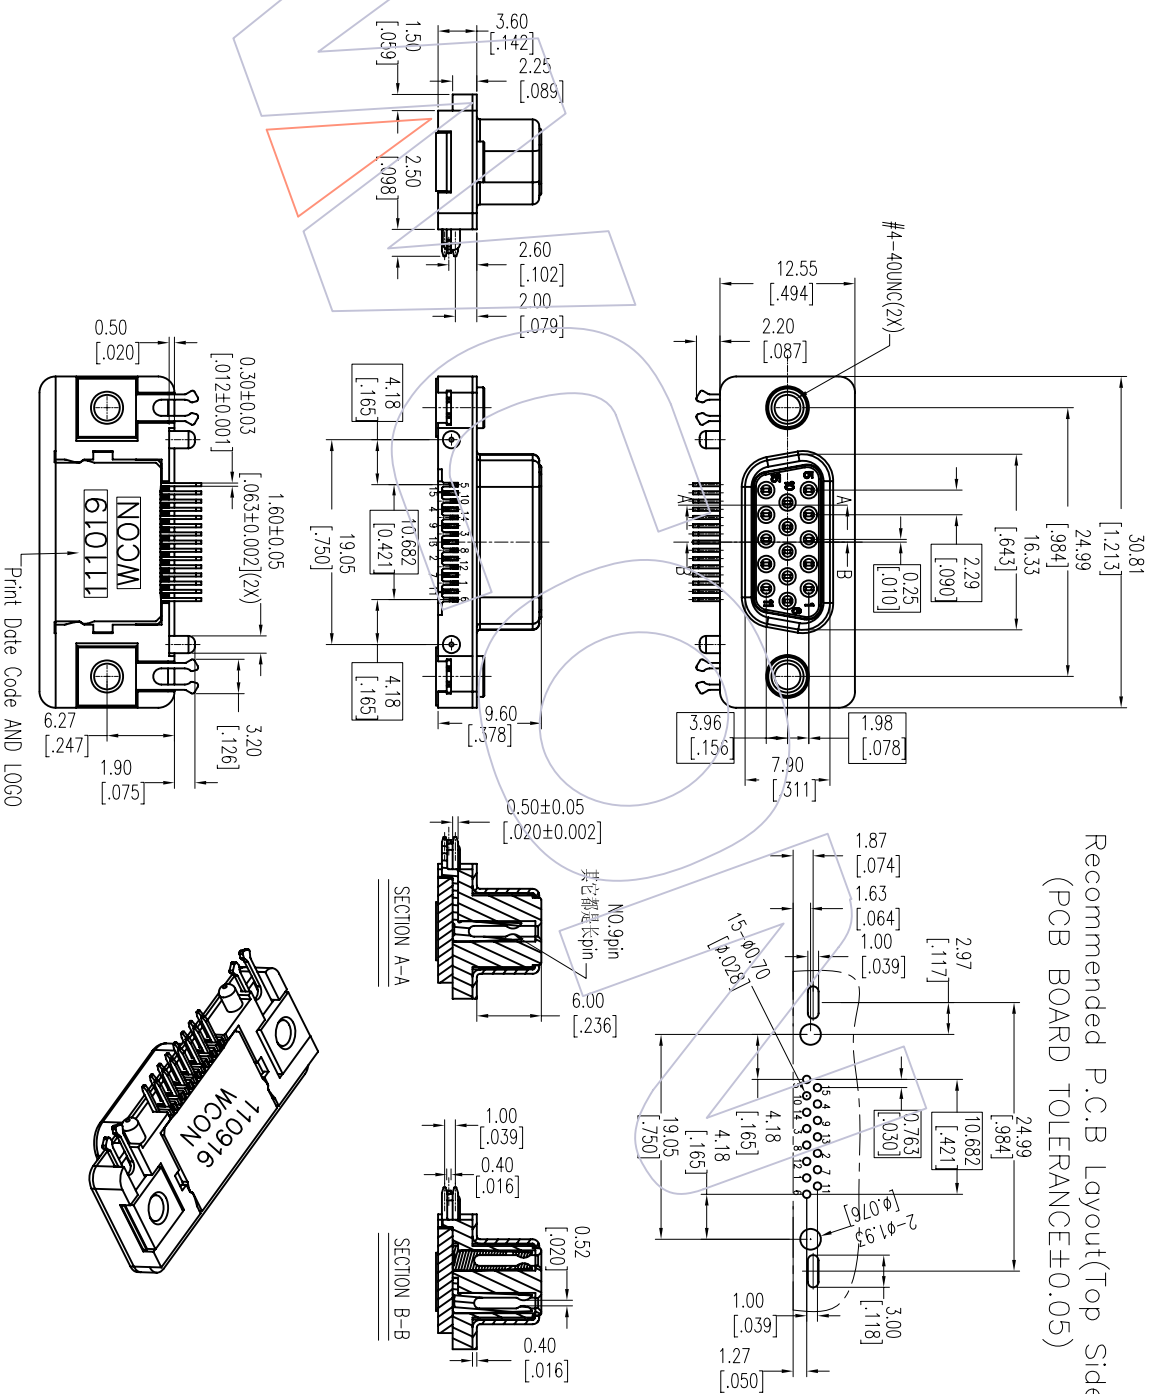

Print Date Code AND LOGO

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: Slim HD/R 15P FEMALE, 90° DIP, Short 9PIN	Customer NO.
XX	JYHuang	2012/12/18	mm		6215B-15FMNS1B01		
XX	CHECK	DATE	SIZE	A4			
XX	± 0.25	± 0.15	ANGLE	± 3°	APPROVE	DATE	SHEET
XX	± 0.15	± 0.15	ANGLE	± 3°	APPROVE	DATE	SHEET
XX	± 0.15	± 0.15	ANGLE	± 3°	APPROVE	DATE	SHEET
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.	
A0	2012/12/18	NEW					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com