

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:


Current Rating: 1.0AMP
Contact Resistance: 35mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500MΩ Min
Operation Temperature: -65°C to +125°C

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

6321- XXX S D XX M N A 04

No.of Pins	Contact Plating	Packing
14 36	S1=3u"Gold/Tin	A:Tray
20 50	S2=5u"Gold/Tin	
26 68	S3=10u"Gold/Tin	
	S4=15u"Gold/Tin	
	S5=30u"Gold/Tin	

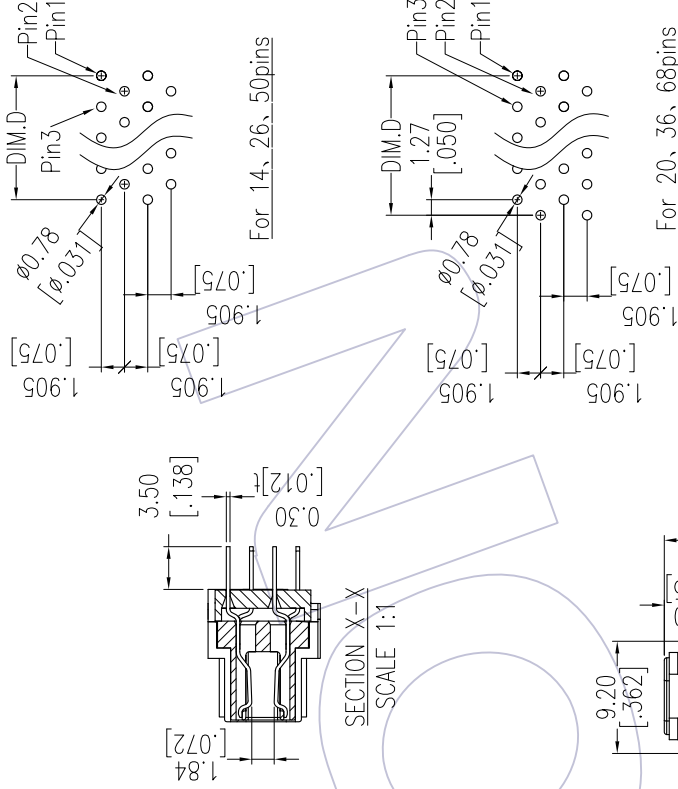

For 20, 36, 68pins

68	63.88	57.93	46.91	41.91	53.65
50	52.45	46.50	35.48	30.48	42.22
36	43.70	37.63	26.59	21.59	33.37
26	37.13	31.28	20.24	15.24	27.18
20	33.32	27.47	16.43	11.43	23.37
14	29.51	23.66	12.62	7.62	19.56
POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com

PART NO. 6321-0XXSDXXMNA04

TITLE:
1.27PITCH CEN 180° TYPE
SCSI FEMALE WITHOUT FIXING

Customer NO.

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
x.x ±0.40	JYHuang	2015/01/07	mm		6321-0XXSDXXMNA04
x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27PITCH CEN 180° TYPE SCSI FEMALE WITHOUT FIXING
x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
Angle ± 3'			PROJ.		

REV	DATE	DESCRIPTION	CHANGE	DESCRIPTION
A0	2015/01/07	NEW	-----	

1 2 3 4 5 6 7 8 9 10
A B C D E F G H