

**NOTES:**

Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Contact Material: Brass  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information




3220-XX R XX B X XX

No. of Pins	Contact Plating	Insulator Color	Latch type	Packing
08 30	G0=Gold Flash	B=Black	L=Long Latch	T=Tube
10 34	G3=10u"Gold	U=Blue	S=Short Latch	
14 40	G4=15u"Gold	G=Grey(427C)		
16 44	G5=30u"Gold	E=Grey(413C)		
20 50	S0=Gold Flash/Tin			
24 60	S3=10u"Gold/Tin			
26 64	S4=15u"Gold/Tin			
68	S5=30u"Gold/Tin			
	SN=Tin			

Item	Pitch	Mating
Standard	2.00	5222
Alternate		
Item	Short Latch	Long Latch
L	17.00	20.85
L1	5.10	8.95
L2	9.10	12.85

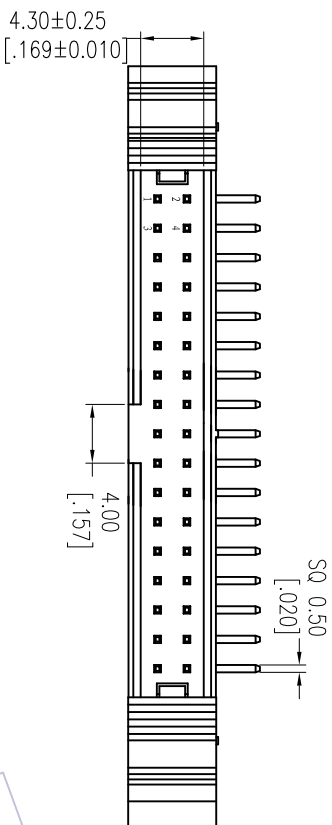

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

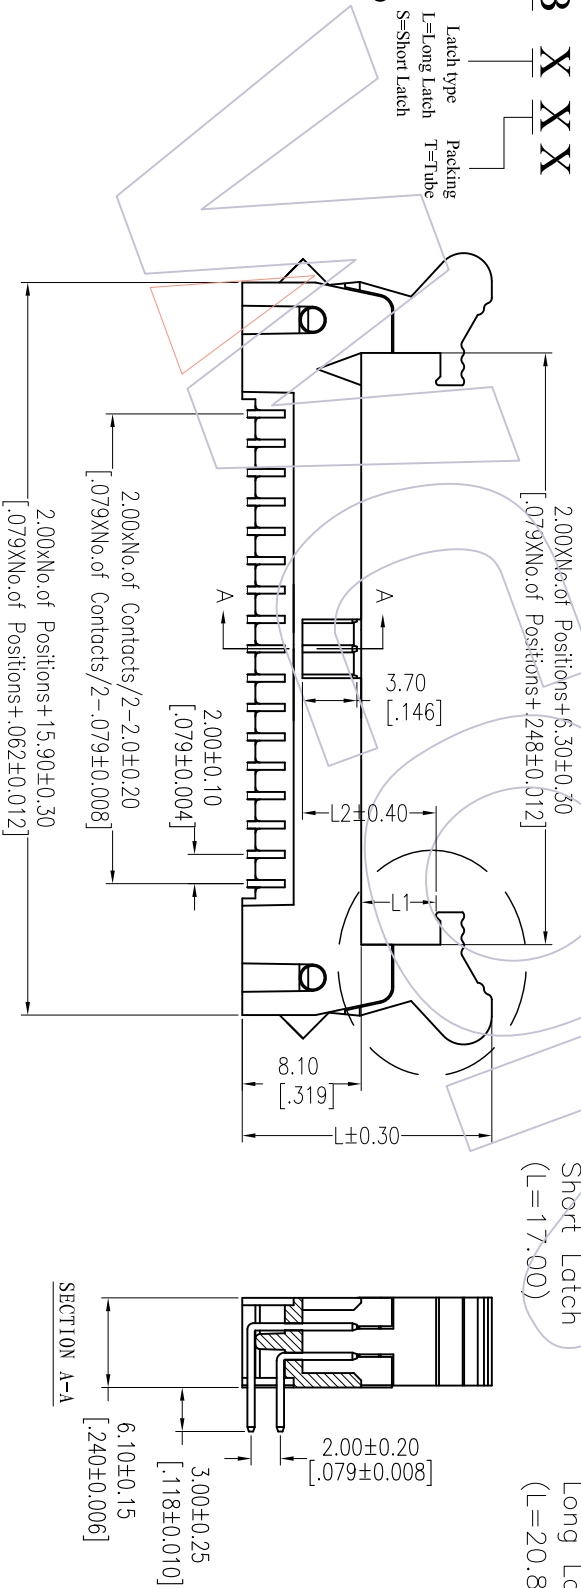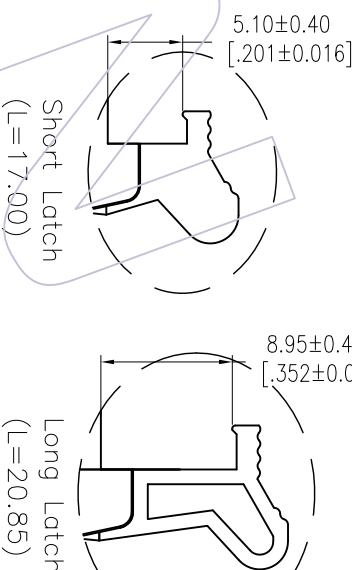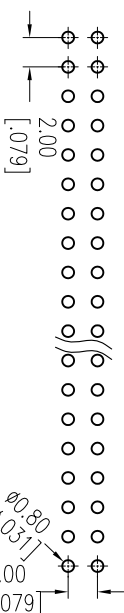

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: 2.00 EJECTOR HEADER 90°	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/12/13	NEW	-----	XX	Tsingun	2012/12/13	mm	A4	3220-XXXXXXX			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
				XX	Tsingun		mm	A4	3220-XXXXXXX	2.00 EJECTOR HEADER 90°	Tel: +86 769 85358920	Tel: +86 512 57468408
				X.XXX	CHECK	DATE	SIZE	SHEET	Customer NO.		Fax: +86 769 85358915	Fax: +86 512 57468468
				Angle	APPROVE	DATE	1/1	PROJ.	K8045		E-mail: sales@wcon.com	E-mail: sales@wcon.com
				± 3'								
				TOL								
											Http: www.wcon.com	
											<b>WCON</b>	