HSF

NOTES:
Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃

Contact Material:Phosphor Bronze
Contact Plating:Au Or Sn Over Ni
Insulator Material:LCP+30%G.F UL94V−0

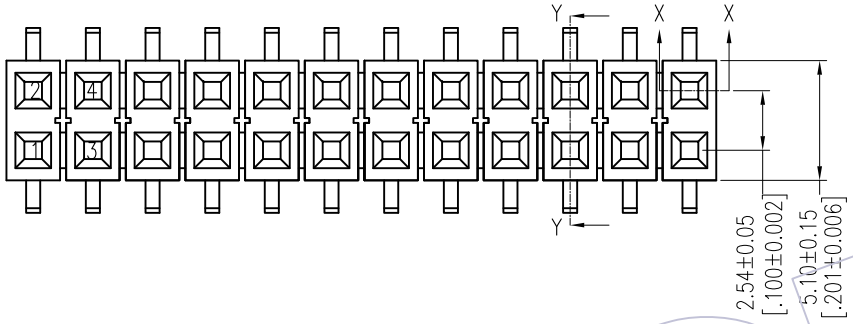

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

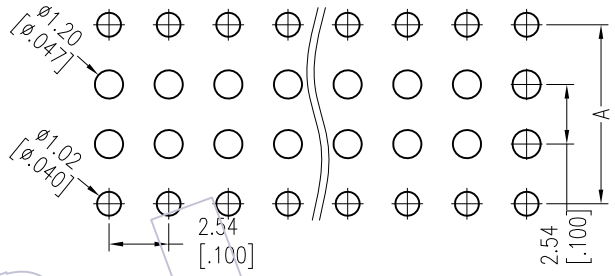

Ordering Information

2185E-2 XX W XX DUN X X

- No.of Pins per ROW:02~40PIN
- Contact Plating: G0=Gold Flash; G3=10μ"Gold; G4=15μ"Gold; G5=30μ"Gold; S0=Gold Flash/Tin; S3=10μ"Gold/Tin; S4=15μ"Gold/Tin; S5=30μ"Gold/Tin; SN=Tin
- Packing: T=Tube
- Series No.

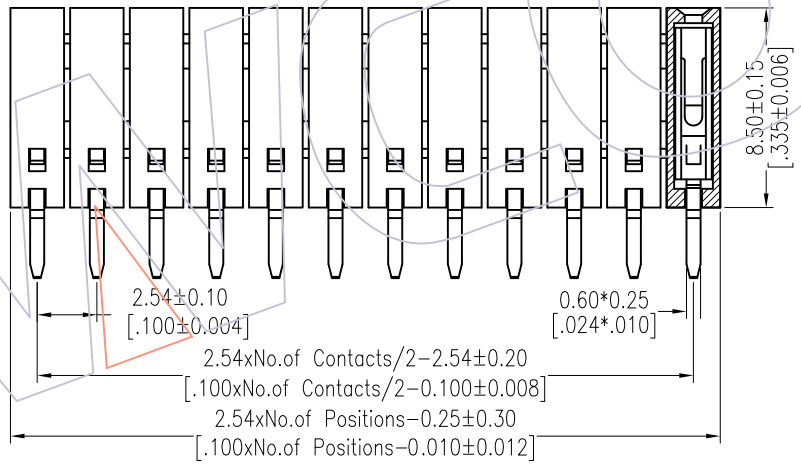

Section X-X

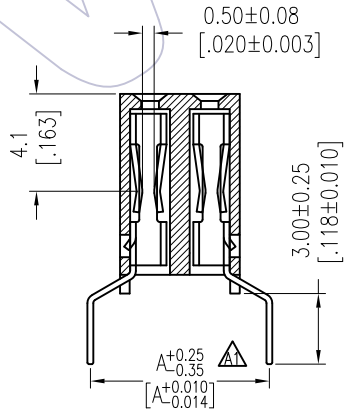

Section Y-Y

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

TITLE(DIM:A)	PART NO.
7.62	2185E−2XXWXXDUNT1
6.50	2185E−2XXWXXDUNT2
5.70	2185E−2XXWXXDUNT3

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2013/11/08	A1 Modify:A±0.25 → A +0.25 −0.35	------
A0	2012/08/16	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Wang	DATE	2013/11/08
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 2185E−2XXWXXXUNXX

TITLE: FH2.54 Dual Row H=8.5 Provision Breaked Centipede Foot

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com