

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%GF UL94V-0


Ordering Information

2240N - 2XX M XX CUNT X

No. of Pins per ROW: 42-40PIN
 Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Packing:
 T=Tube
 P=Tube+CAP
 R=Tapex/Reel+CAP

Series No.
 1=Type 1
 2=Type 2

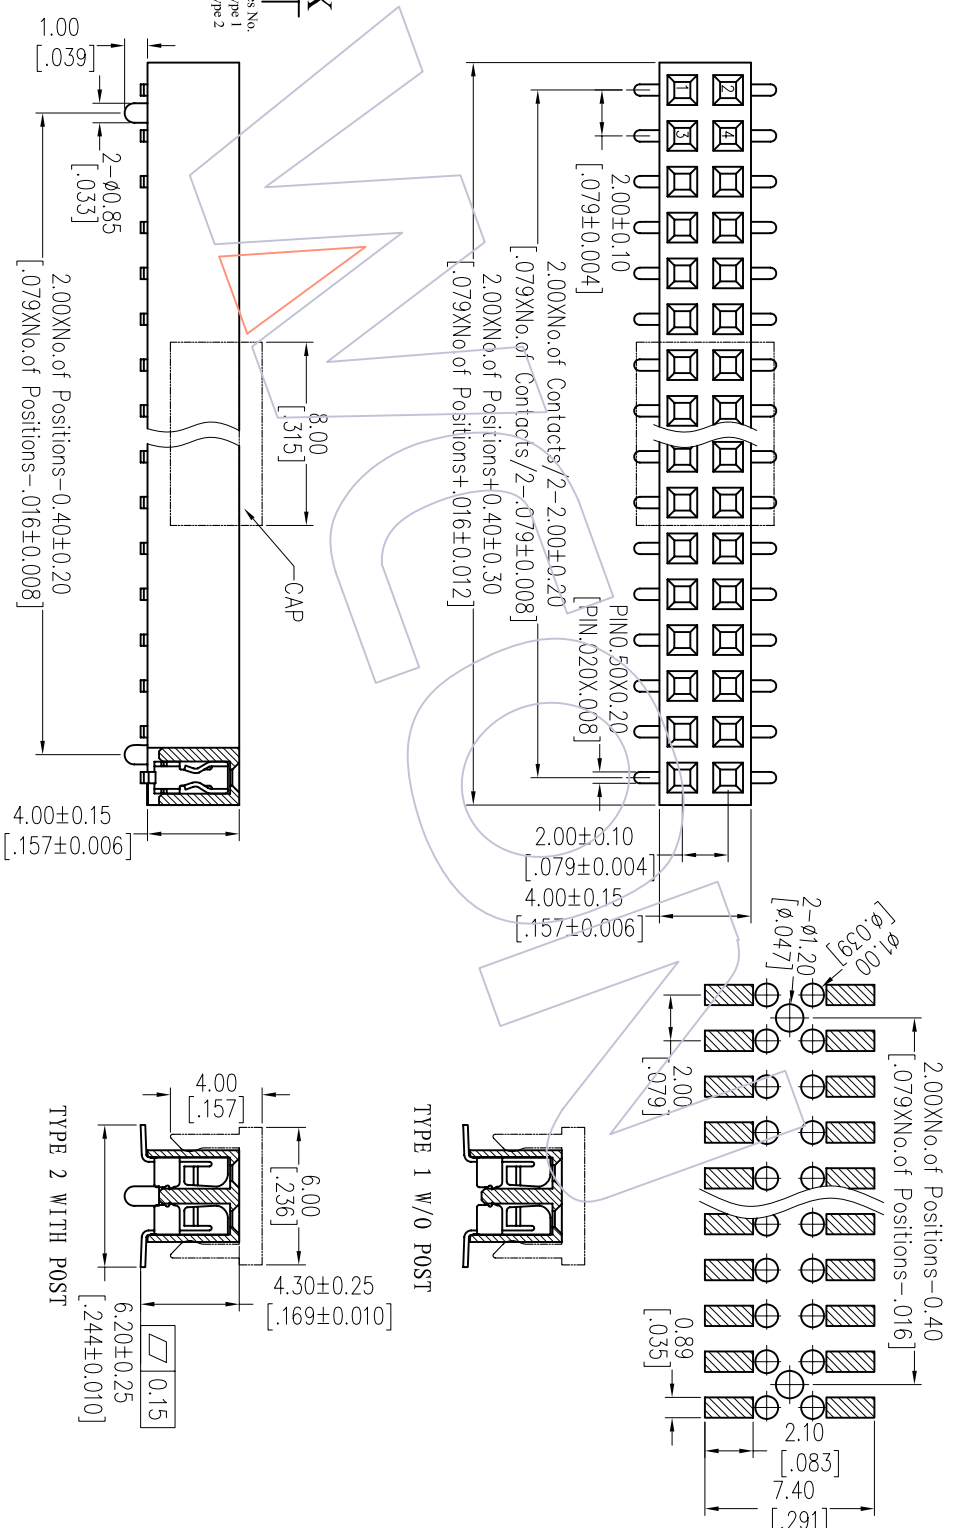

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuog		2012/07/13		mm				SBB TABLE	
XX	±0.25	CHECK		DATE		A4				TITLE: FH2. 0mm DUAL ROW 180° SMT H=4.0 W=4.0	
X.XXX	±0.15	Angle		DATE		1/1				Customer NO.	
± 3'	TOL	APPROVE		DATE		PROJ.					
CHANGE	DIW										
REV	DATE	MODIFICATION DESCRIPTION									
A0	2012/07/13	NEW									

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85538920
 Fax: +86 769 85538915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com