







NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+30%G.F UL94V-0 BK

Ordering Information

1220-13 XX XX R XXX X 1

No. of Pins Contact Plating Pin Length(Short) Packing
 Per Row: 03-40 G0=Gold Flash L=A+B+D+3.0 0=PE Bag
 G3=10u"Gold Standard: 10S=10.5 T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Item	Pin Length	A	D	B	Molding
Standard	10.50	2.80	0.75	4.00	2263
Alternate					

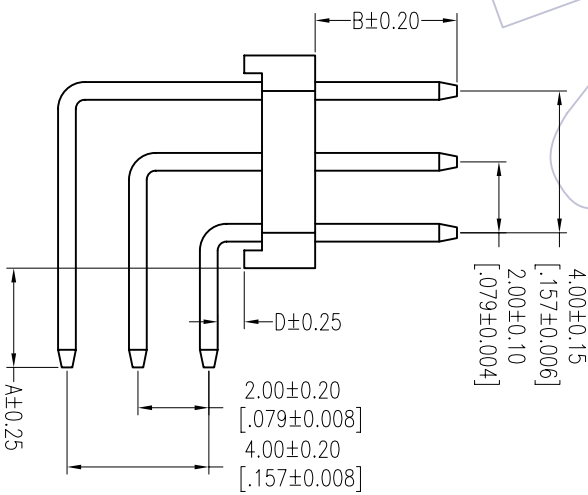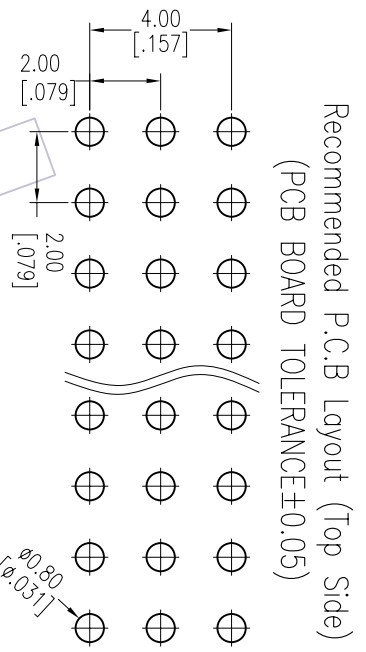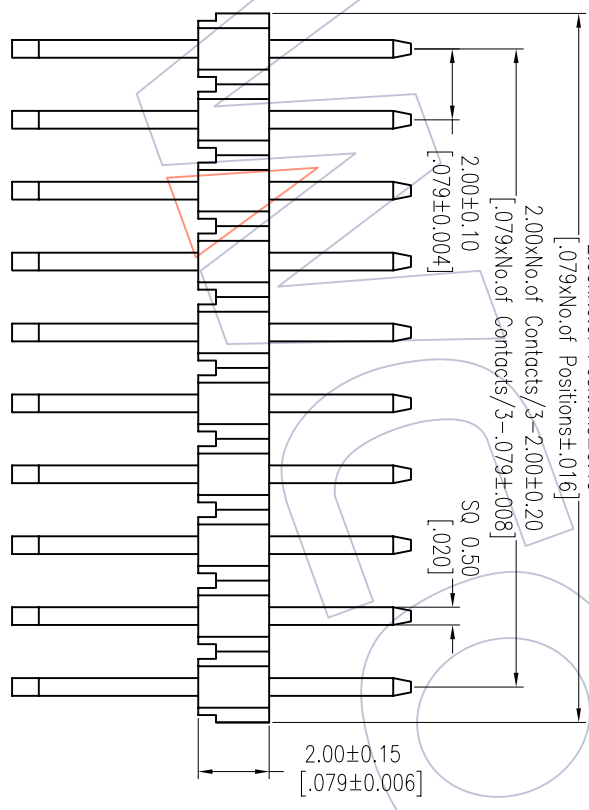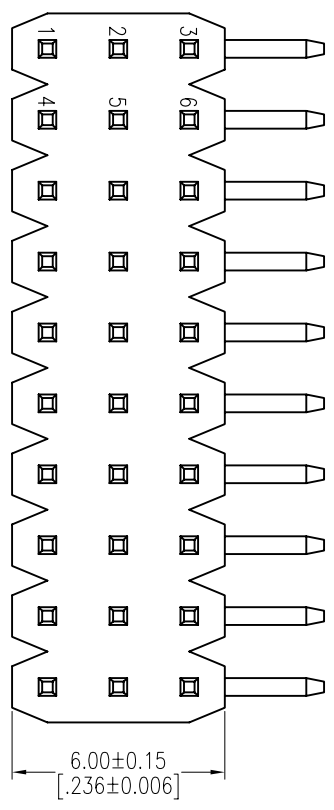

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/04/26	NEW	-----	XX	<i>William Diao</i>	2012.04.26	mm	1220-13XXXXRXXXXX	PH2.00 THREE ROW 90° H=2.0 CONCAVE BENDING	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
				XX			mm				
				XX			A4				
				X.XXX	CHECK	DATE	SIZE				
				Angle	APPROVE	DATE	SHEET				
				± 3'			1/1				
				DIM			PROJ.				
				TOL							



Http: www.wcon.com
 WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com
 WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com