

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:
 Current Rating:1.0A
 Voltage Rating: 100V AC,DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 800V AC/minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF(UL94V-0)

Ordering Information

WF2001 - WZ XX X 0 1

No. of pins 02~16P
 Contact Plating S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold Blank=Tin
 Color B=Black 0=PE Bag F=Beige W=White T=Natural
 Packaging

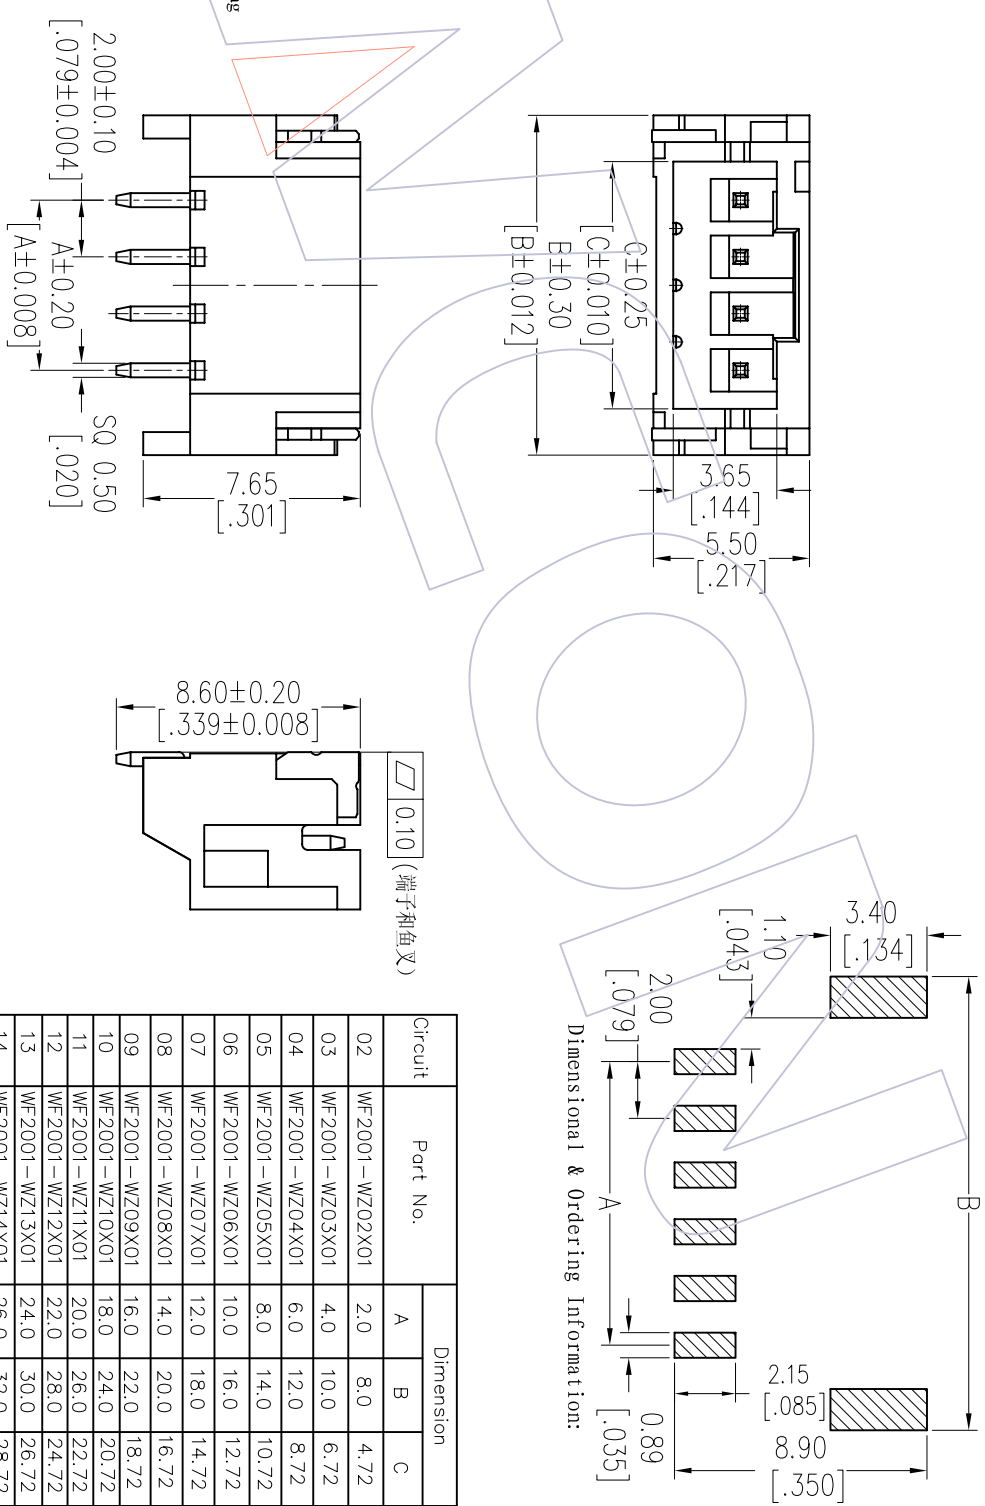

Dimensional & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF2001-WZ02X01	2.0	8.0	4.72
03	WF2001-WZ03X01	4.0	10.0	6.72
04	WF2001-WZ04X01	6.0	12.0	8.72
05	WF2001-WZ05X01	8.0	14.0	10.72
06	WF2001-WZ06X01	10.0	16.0	12.72
07	WF2001-WZ07X01	12.0	18.0	14.72
08	WF2001-WZ08X01	14.0	20.0	16.72
09	WF2001-WZ09X01	16.0	22.0	18.72
10	WF2001-WZ10X01	18.0	24.0	20.72
11	WF2001-WZ11X01	20.0	26.0	22.72
12	WF2001-WZ12X01	22.0	28.0	24.72
13	WF2001-WZ13X01	24.0	30.0	26.72
14	WF2001-WZ14X01	26.0	32.0	28.72
15	WF2001-WZ15X01	28.0	34.0	30.72
16	WF2001-WZ16X01	30.0	36.0	32.72

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.				
XX	JYHuang	2012/08/25	UNIT	mm	SEE TABLE				
XX	CHECK	DATE	SIZE	A4	TITLE:				
X.XXX	Angle	± 3'	SHEET	1/1	"J" TYPE PH.2.0 WAFER 90° SMT				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	CUSTOMER NO.
A0	2012/08/25	NEW	---						

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com