

HSF

NOTES:

Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃




Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)

Ordering Information

6311 - 068 X D XX P N X 01





△ No.of Pins per 068=68PIN
 Contact Plating
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 SM=Mate Tin

Packaging
 A=Tray
 T=Tube

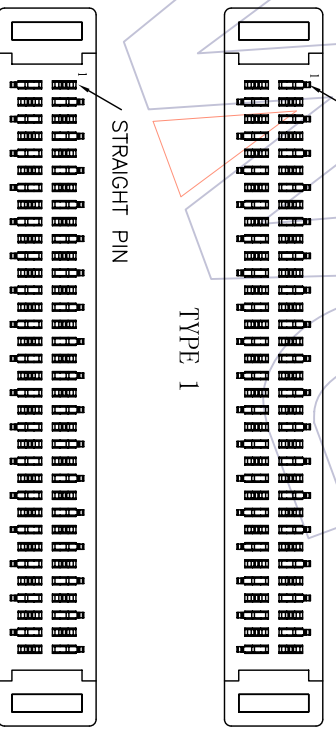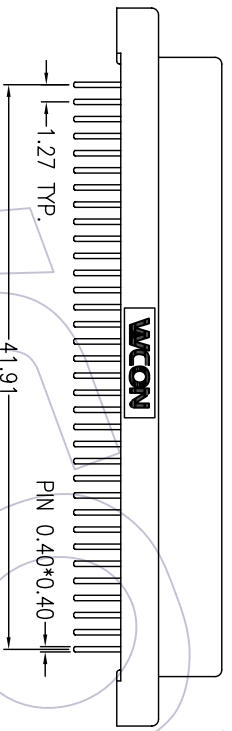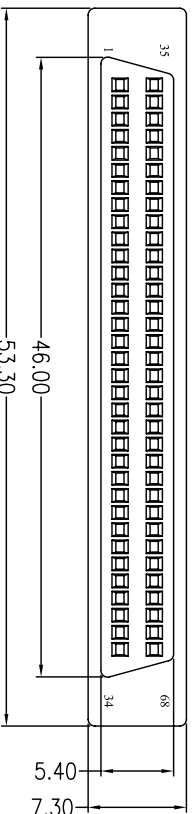

TYPE 2

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

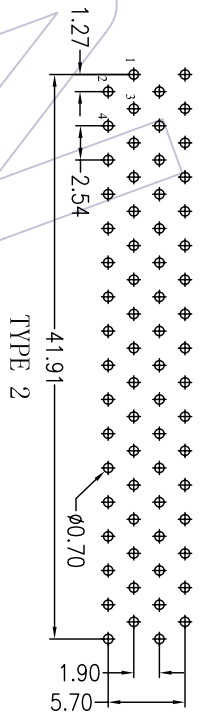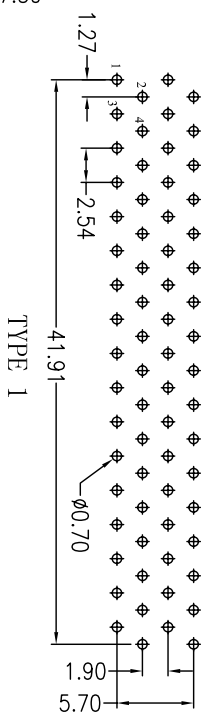

| | | | |
|-----|----------|---|--------|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
| A0 | 09/02/16 | NEW | |
| A1 | 11/08/13 | Modify 6311-068SDXXP01 — 6311-068DXXPNX01 | △ |
| A2 | 12/05/21 | Modify | |

| | | | | |
|-------------|---------|------------|-------|-----|
| OPERATION | DRAW | DATE | SCALE | FIT |
| X.X | Tong | 2012/05/21 | mm | 1/1 |
| X.XXX ±0.40 | CHECK | DATE | UNIT | mm |
| X.XXX ±0.25 | APPROVE | DATE | SIZE | A4 |
| X.XXX ±0.15 | APPROVE | DATE | SHEET | 1/1 |
| Angle ± 3' | PROJ. | | | |
| DIM TOL | | | | |

PART NO. 6311-068DXXPNX01
 TITLE: 68P FEMALE SCSI D-SUB 180° DIP
 Customer NO.

WPCON

Http: www.wcon.com
 WPCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com
 WPCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com