HSF

NOTES:
Current Rating:1AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PA9T+30%GF(UL94V−0)
6 To 8 Pin No "D" Configuration

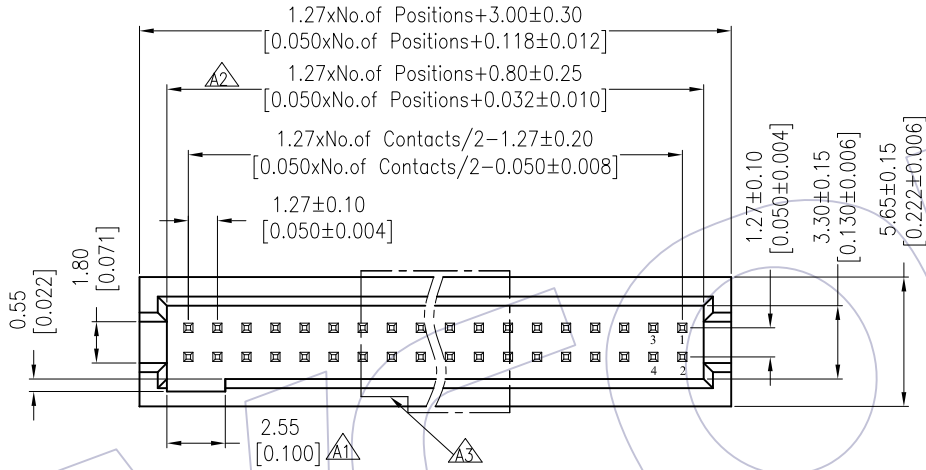

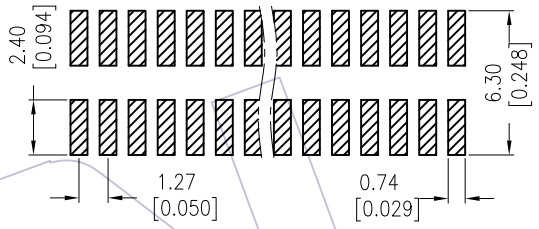

Ordering Information

3131- XX M XX B K 00 X 1

No.of Pins	Contact Plating	Color Insulator	Packing
6 8	G0=Gold Flash	B=Black	T=Tube
10 34	G3=10u"Gold	U=Blue	P=Tube+CAP
14 40	G4=15u"Gold	W=White	R=Tape&Reel+CAP
20 44	SN=Tin		
24 50			
26 60			
30 64			
32 80			
A4 100			

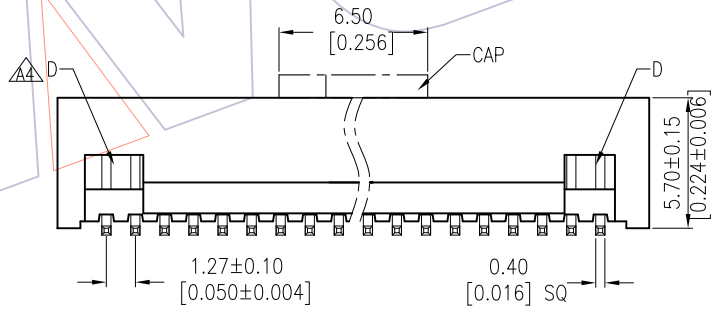



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A4	2013/09/27	Modify	A4
A3	2012/08/30	Modify CAP	A3
A2	2009/04/14	Change Dimension	A2
A0	2008/05/02	NEW	——

OPERATION		DRAW	DATE	SCALE	FIT
X.X	±0.40	Tsingsn	2013/09/27	UNIT	mm / inch
X.XX	±0.25	CHECK	DATE	SIZE	A4
X.XXX	±0.15			SHEET	1/1
Angle	± 3°	APPROVE	DATE	PROJ.	
DIM	TOL				

PART NO. 3131-XXMXXBK00X1
TITLE: 1.27 BOX HEADER SMT H=5.70
Customer NO.

WCON
Http: www.wcon.com
WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com
WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com