

HSF


NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC Δ
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Insulator Material: PBT+30%G.F UL94V-0
 Mated with: 3210 Series
 Used with: 3210-T

Ordering Information

3210 - H XX B 01

No. of pins
 10P~40P
 Color
 B=Beige
 W=White
 B=Black

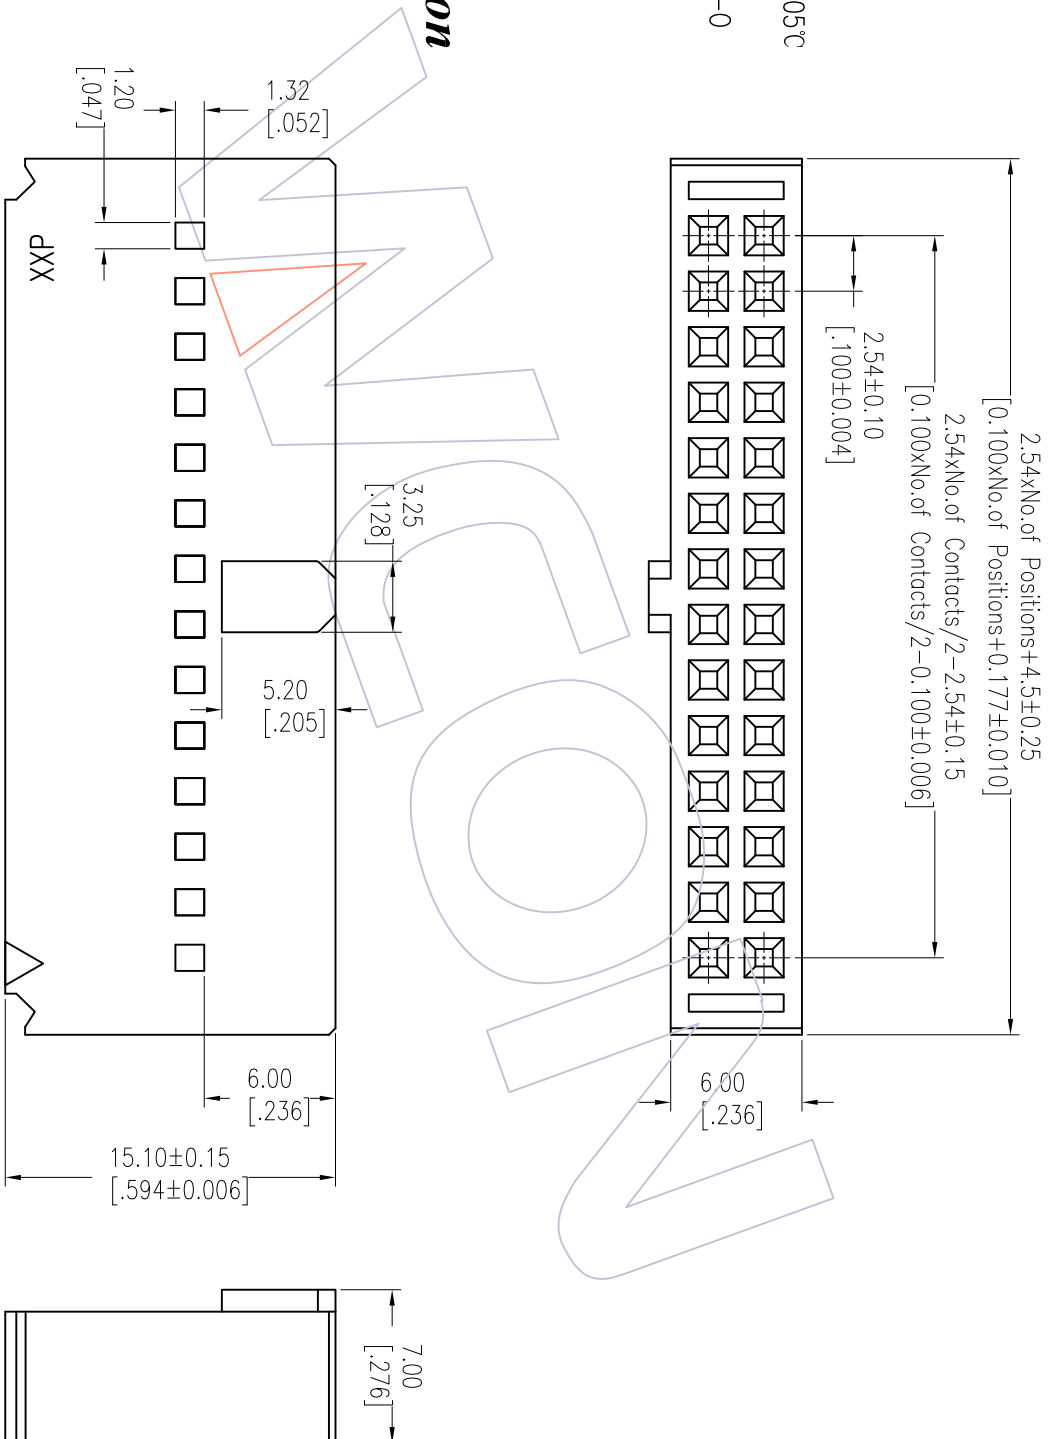

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/10/08	NEW	-----	X.XX	TsingSn	2013/02/25	mm	A4	3210-H-XXB01	
A1	2013/02/25	Modify	Δ	X.XX	CHECK	DATE	mm	A4	TITLE: 2.54mm "T" TYPE HOUSING H=1.5.10	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	1/1	Customer NO.	
				± 3'			PROJ.			