





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

- Current Rating: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C

- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

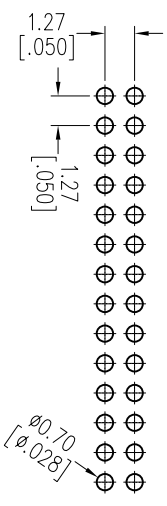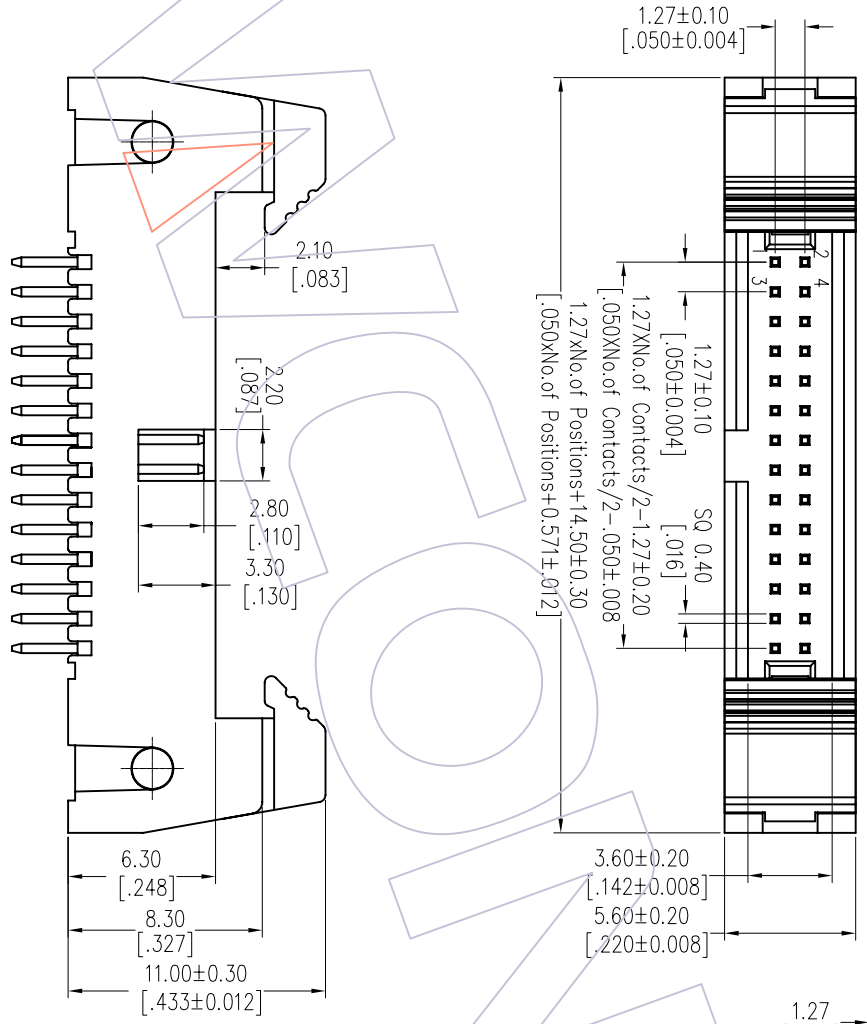

Ordering Information

3230-XX S XX B S X 1

- No. of Pins: 10, 30, 14, 34, 16, 40, 20, 44, 24, 50, 26, 60
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Insulator Color: B=Black, U=Blue, G=Grey(427C)
- Packing: T=Tube

| | | |
|-----------|-------|--------|
| Item | Pitch | Mating |
| Standard | 1.27 | 5232 |
| Alternate | | |

| | | | | | | | | | | | | |
|-----|------------|--------------------------|--------|-----------|---------|------------|-------|-----|-----------------|--------------------------|--|--|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. | TITLE: | WCON-Dongguan | WCON-Kunshan |
| A0 | 2012/09/28 | NEW | | XX | JYHuang | 2012/09/28 | mm | A4 | 3230-XXXXXXBSX1 | 1.27 EJECTOR HEADER 180° | Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com |
| | | | | X.XXX | CHECK | DATE | SHEET | 1/1 | | Customer NO. | Http: www.wcon.com | |
| | | | | Angle | APPROVE | DATE | PROJ. | | | | | |
| | | | | ± 3' | | | | | | | | |
| | | | | DIM | | | | | | | | |
| | | | | TOL | | | | | | | | |



Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com