

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0


Ordering Information

2135-2 XX M XX C U N X X



No of Pins per ROW: 02-40PIN
 Contact Plating: GP=Gold Flash
 G3=10μm Gold
 G4=15μm Gold
 G5=30μm Gold
 S0=Gold Flash/Tin
 S3=10μm Gold/Tin
 S4=15μm Gold/Tin
 S5=30μm Gold/Tin
 SN=Tin
 SM=Matte Tin

Packing: T=Tube
 P=Tube+CAP
 R=Tube&Reel+CAP

Series No. I=TYPE 1
 2=TYPE 2

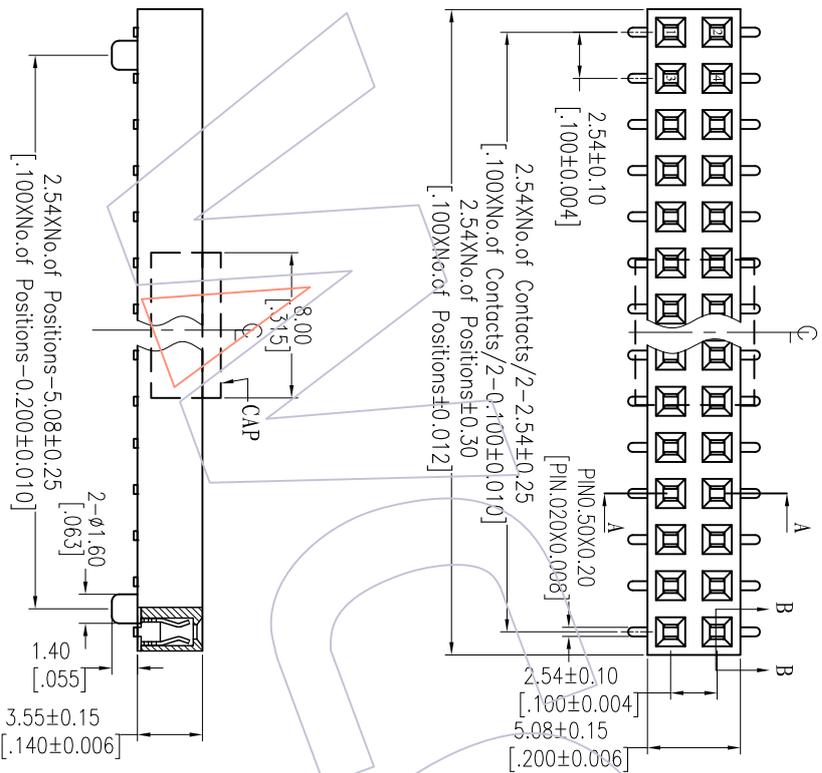

SECTION B-B

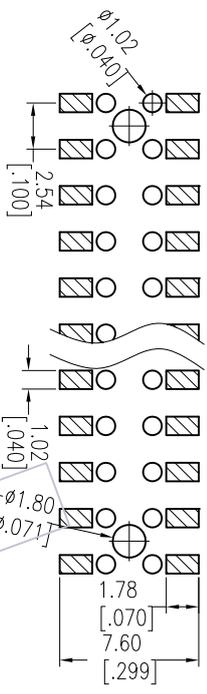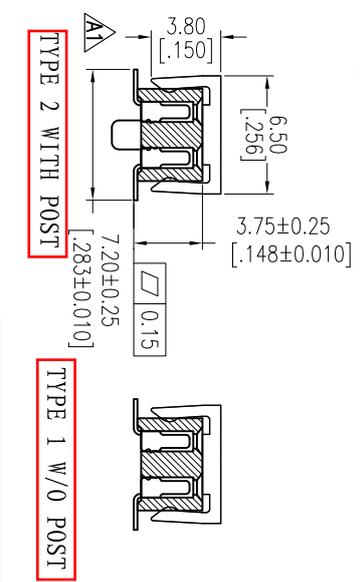

Recommended P.C.B. Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Special CAP for 2*2P-2*4P

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

TITLE	PART NO.
TYPE 1	2135-2XXMXXCUNX1
TYPE 2	2135-2XXMXXCUNX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	13/06/17	Modify CAP 4.30 → 3.80		X.X	Wang	2013/06/17	UNIT	mm	SEE TABLE
A0	12/08/02	NEW		X.XX	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX	APPROVE	DATE	SHEET	1/1	FH2.54mm DUAL ROW 180° SMT
				Angle	APPROVE	DATE	PROJ.		H=3.50
				DM	TOL				Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com