




NOTES:

- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40℃ to +105℃
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: LCP+30%GF UL94V-0

Ordering Information

2245T - 2 XX M XX D U N X 2

- No. of Pins per Row: 04 PIN
- 12 PIN
- 14 PIN
- Contact Plating: GP=Gold Flash
- G0=Gold Flash
- G3=10μ Gold
- G4=15μ Gold
- G5=30μ Gold
- SP=Gold Flash/Tin
- S3=10μ Gold/Tin
- S4=15μ Gold/Tin
- S5=30μ Gold/Tin
- SN=Tin
- SM= Matte Tin
- Packing: T=Tube
- P=Tube+CAP
- R=Tap&Reel+CAP

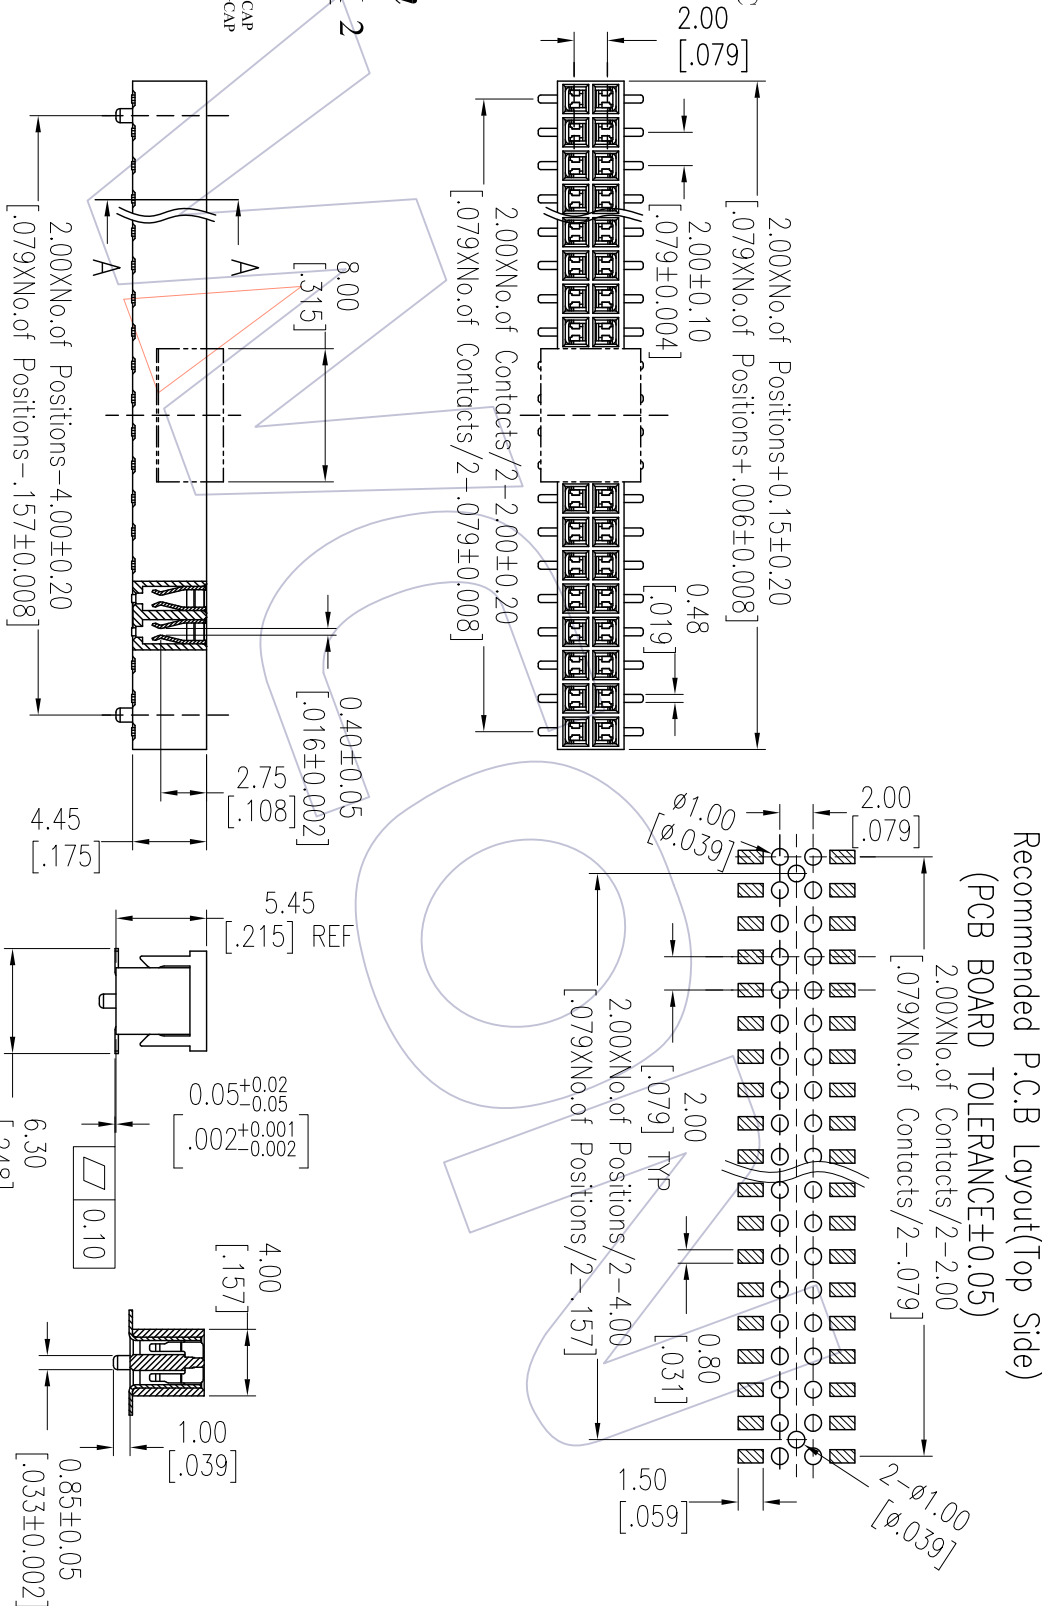

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)
 2.00XNo. of Contacts/2-2.00
 2.00XNo. of Contacts/2-0.79

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A0	2012/07/17	NEW	---	X.X	JYHuang	2012/07/17	UNIT	mm	2245T-2XXMXXDUNX2	PH2.00 Dual Row Top Enter If=4.45	K2058U	Tel: +86 769 85358920	Tel: +86 512 57468408
				X.XXX	CHECK	DATE	SIZE	A4				Fax: +86 769 85358915	Fax: +86 512 57468468
				Angle	APPROVE	DATE	SHEET	1/1				E-mail: sales@wcon.com	E-mail: sales@wcon.com
				± 3'			PROJ.						



Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com