HSF

NOTES:
Rated Current:3.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK

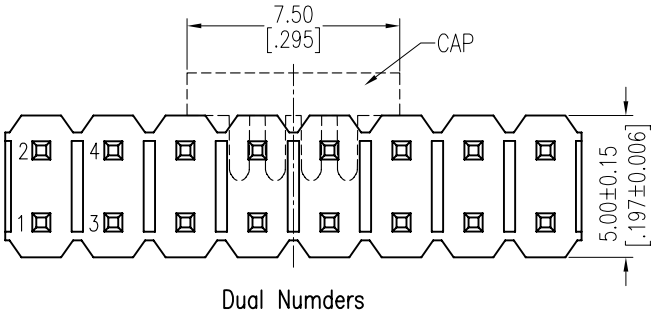

Dual Numders

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

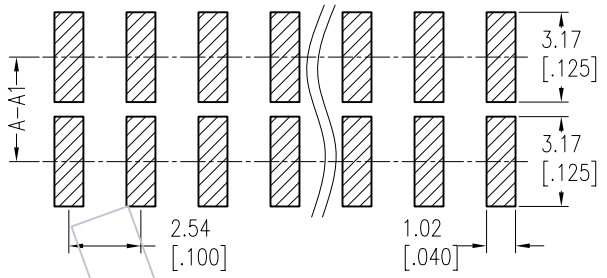

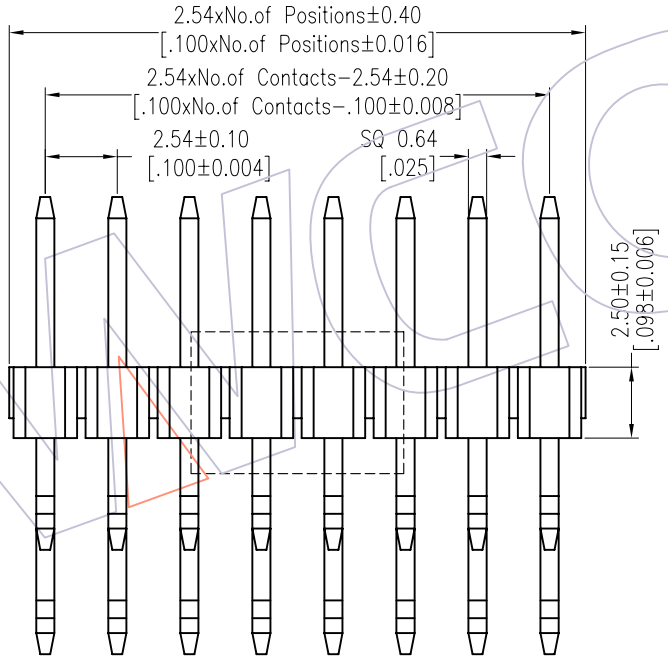

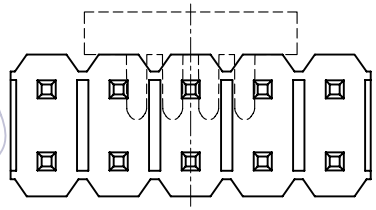

Odd Numder

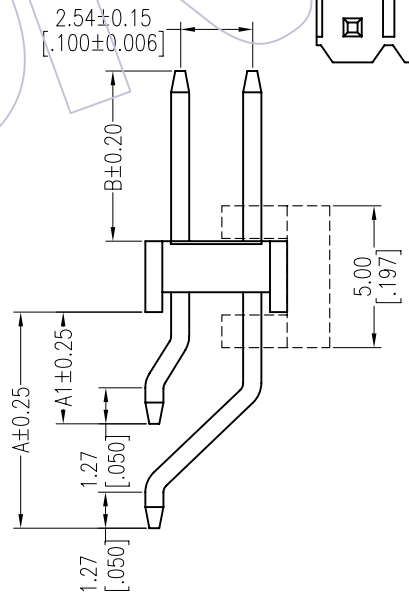

Ordering Information

1125-12 XX XX Z XXX X 1

No.of Pins	Contact Plating	Pin Length(Short)	Packing
Per Row:02~40	G0=Gold Flash	L=A1+B+2.8	T=Tube
	G3=10u"Gold	Standard:128=12.8	P=Tube+CAP
	G4=15u"Gold		R=Tape&Reel+CAP
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

Item	Pin Lenght	A1	A	B	Mating
Standard	12.80	3.94	7.62	6.00	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/05/28	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW: William Chen — DATE: 2012.05.28
CHECK — DATE
APPROVE — DATE

SCALE	Fit
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 1125-12XXXXZXXXXX

TITLE: PH2.54 DUAL ROW 90° SMT H=2.5

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com