


NOTES:
 Current Rating:3.0A AMP
 Contact Resistance:20milliohm Max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000Megohtm Min
 Operation Temperature:-25°C to +85°C

Housing Material:PBT+30%GF Black(Ul94V-0)
 Contact Material:Brass
 Contact plating:Sn over Ni Plating

Ordering Information

WF2548-2 H XX B 0 1

Colour:
 B:Black

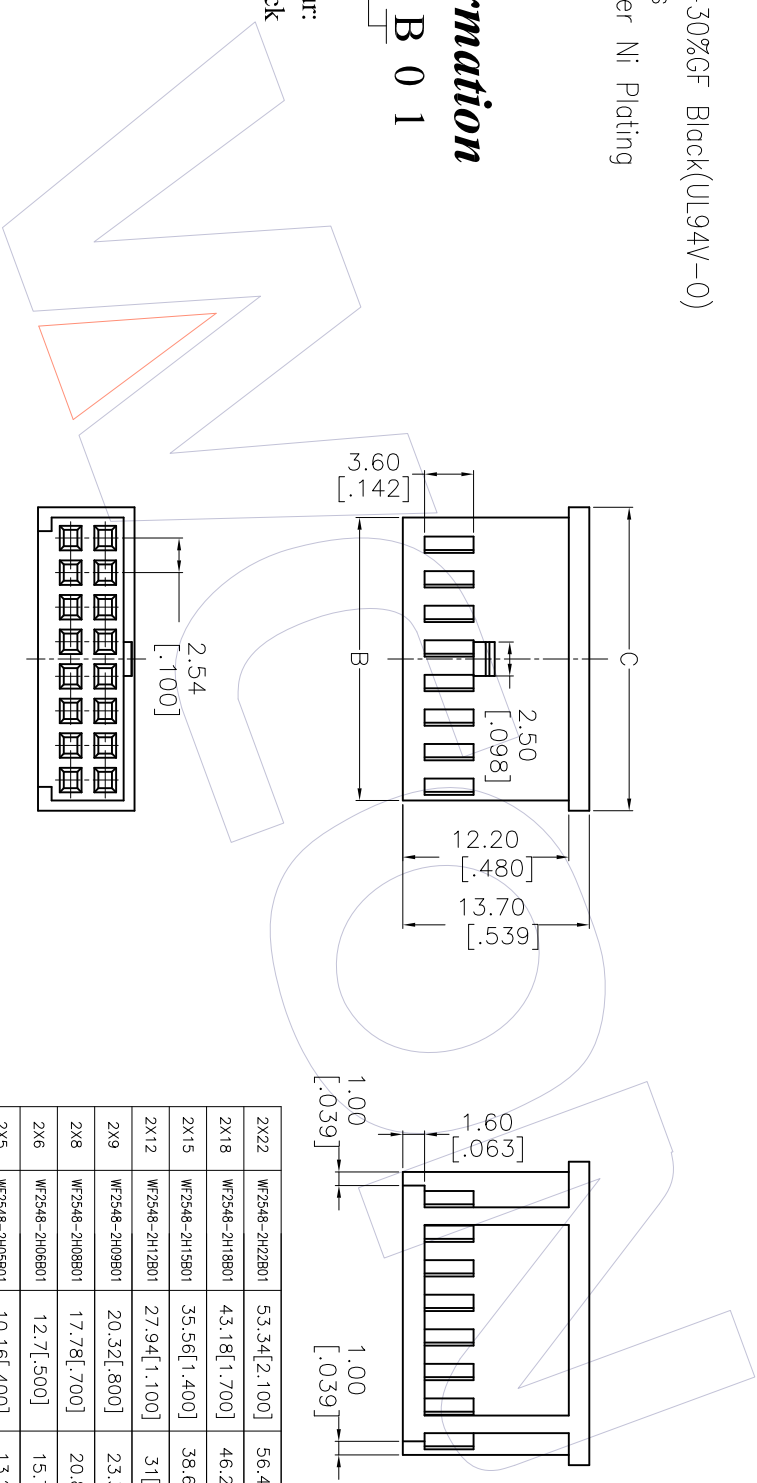

2X22	WF2548-2H22B01	53.34[2.100]	56.4[2.220]	57.9[2.280]
2X18	WF2548-2H18B01	43.18[1.700]	46.2[1.819]	47.8[1.882]
2X15	WF2548-2H15B01	35.56[1.400]	38.6[1.520]	40.1[1.579]
2X12	WF2548-2H12B01	27.94[1.100]	31[1.220]	32.5[1.280]
2X9	WF2548-2H09B01	20.32[.800]	23.3[.917]	24.9[.980]
2X8	WF2548-2H08B01	17.78[.700]	20.8[.819]	22.3[.878]
2X6	WF2548-2H06B01	12.7[.500]	15.7[.618]	17.2[.677]
2X5	WF2548-2H05B01	10.16[.400]	13.2[.520]	14.7[.579]
2X4	WF2548-2H04B01	7.62[.300]	10.6[.417]	12.2[.480]
Circuit	Port No.	Dimension		
		A	B	C

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A0	2012.11.16	NEW	-	X.XXX ±0.15 Angle ±.3 DWM TOL	LKP CHECK APPROVE	2012.11.16	1:1 mm inch A4 1/1	WF2548-2HXXXB01	2.54mm Double Row Housing		Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
1				X.X ±0.40	LKP							
				X.XXX ±0.25	CHECK							
				X.XXX ±0.15	APPROVE							



Http: www.wcon.com