



**NOTES:**




- Rated Current: 3.0AMP.
- Contact Resistance: 20mΩ Max.
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min.
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating: Au or Sn Over Ni
- Insulator Material: PA9T+30%G.F UL94V-0 BK

**Ordering Information**


1125-13 XX XX R XXX X 1

No. of Pins Contact Plating Pin Length(Short) Packing  
 Per Row: 03-40 G0=Gold Flash L=A+B+D+3.7 0=PE Bag  
 G3=10u"Gold Standard: 139=13.9 T=Tube  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin

Item	Pin Length	A	D	B	Mating
Standard	13.90	3.00	1.20	6.00	2185
Alternate					

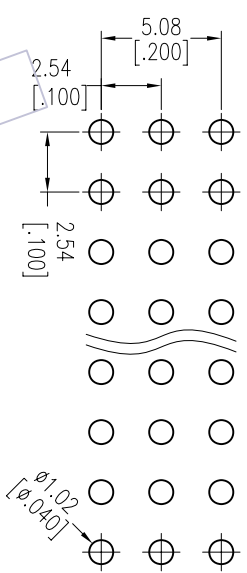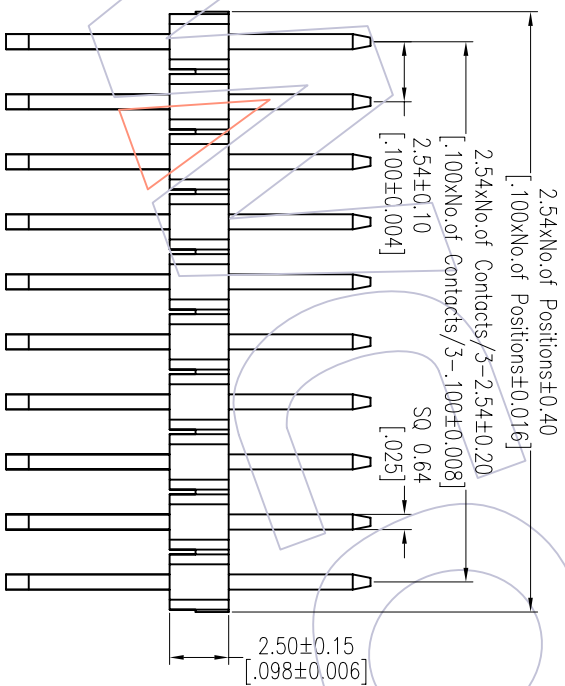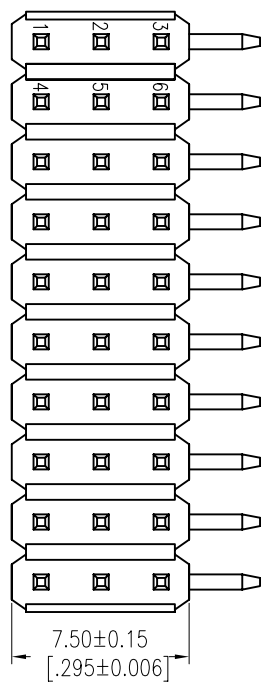

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

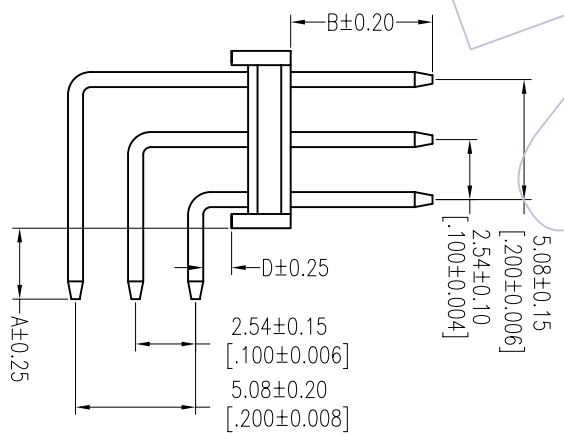

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2013/02/28	Modify Drawing		XX	<i>William Diao</i>	2013.02.28	mm 1/1	1125-13XXXXXXXXXX	PH2.54 THREE ROW 90° CONCAVE BENDING H=2.5	Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2012/06/16	NEW		XX	CHECK		A4			Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'	APPROVE	DATE	SHEET 1/1	Customer NO.		E-mail: sales@wcon.com	E-mail: sales@wcon.com



Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com