HSF

NOTES:
Current Rating:3.0A AMP
Contact Resistance:25milliohm Max
Withstand Voltage:500V AC/Minute
Insulation Resistance:1000Megohm Min
Operation Temperature:-55℃ to +105℃

Housing Material:PBT+30%GF(UL94V-0)
Contact Material:Copper alloy
Contact plating:Au/Sn over Ni Plating
Shell:Cold Roller Steel,Ni or Sn Plated
Revit/Harpoon:Brass,Tin Over Ni Plated
Screw:Brass,Ni Plated

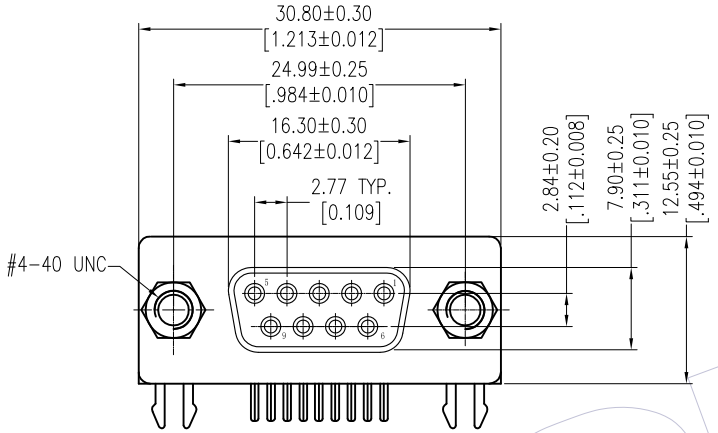

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

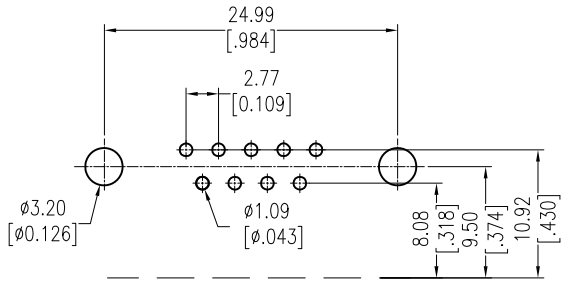

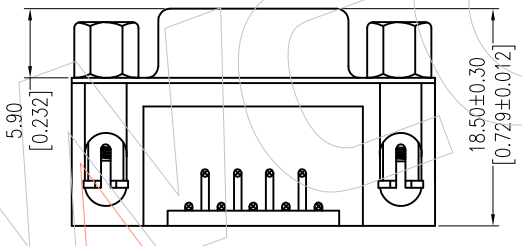

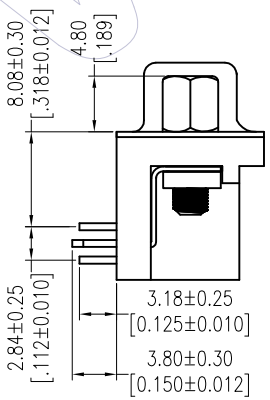

6223-09FWNXXX01

Ordering Information

6223- 09 F X N XX B 01

- No.of Pins: 9P
- Product Type
  - W=With Revit With Screw
  - M=With Revit Without Screw
  - S=No Revit Lock With Screw
  - H=With Revit With Screw(Don't lock)
- Contact Plating:
  - G0=Gold Flash
  - G1=3u"Gold
  - G2=5u"Gold
  - G3=10u"Gold
  - G4=15u"Gold
  - G5=30u"Gold
  - S0=Gold Flash/Tin
  - S1=3u"Gold/Tin
  - S2=5u"Gold/Tin
  - S3=10u"Gold/Tin
  - S4=15u"Gold/Tin
  - S5=30u"Gold/Tin
  - SN=Tin
- Insulator Color:
  - B= Black



6223-09FMNXXX01



6223-09FSNXXX01



6223-09FHNXXX01

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014/02/28	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Allen	DATE	2014/02/28
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 6223-09FXNXXB01

TITLE: D-SUB FEMALE CONNECTOR 9P 8.08 FOOTPRINT RIGHT ANGLE TYPE

Customer NO.

WCON
Http: www.wcon.com
WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com