

HSP

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze 
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5320-XX P XX B 01

No. of Pins	Contact Plating	Color Insulator
10 30	S0=Gold Flash/Ni	B=Black
14 34	S3=10u"Gold/Ni	G=Grey(427C)
16 40	S4=15u"Gold/Ni	E=Grey(413C)
18 44	S5=30u"Gold/Ni	
20 50	SN=Tin	
24 60	SM=Matte Tin	
26 64		

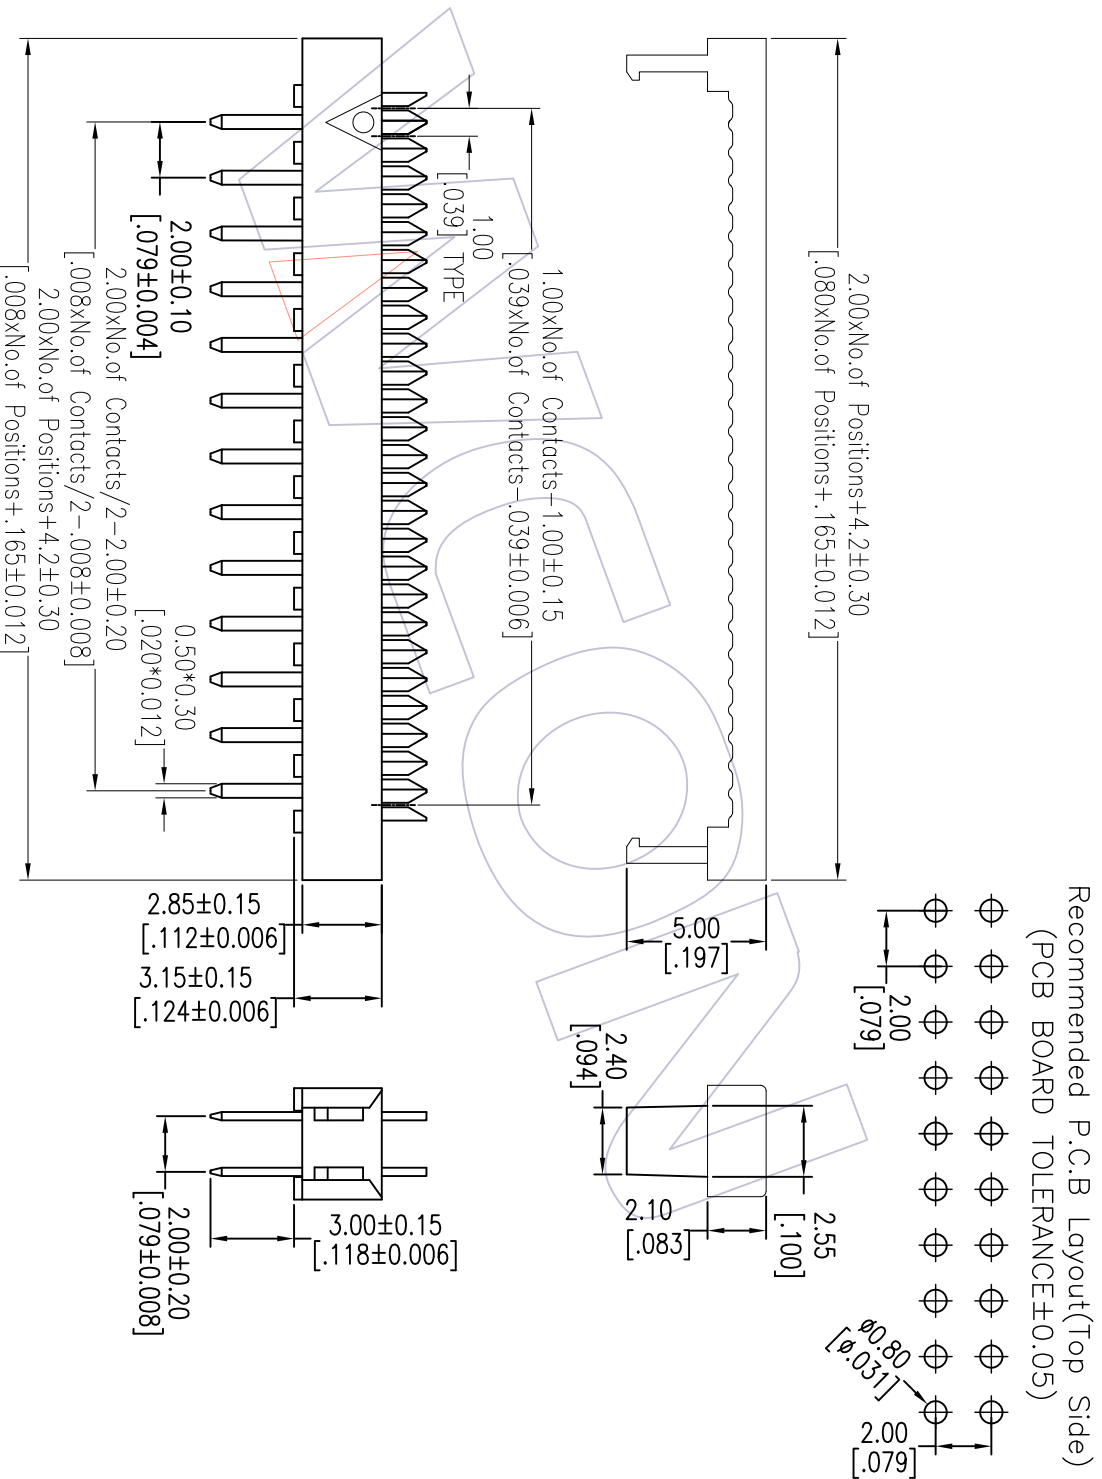

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A1	2013/07/03	Modify The Contact Material,Modify Part No.	-----	X.XX	JYHuang	2013/07/03	UNIT	mm	5320-XXPXXB01	2.00 DIP PLUG CONNECTOR
A0	2012/10/09	NEW	-----	X.XXX	CHECK	DATE	SIZE	A4		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	1/1	Customer NO.	
			DIM	± 3'	TOL	PROJ.				

Http: www.wcon.com

WCON-Dengqun
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com