

HSF


NOTES:
 Current Rating: 3.0AMP
 Voltage Rating: 250V
 Contact Resistance: 10mΩ Max
 Withstand Voltage: 750V AC/DC/Minute
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -25 °C to +85°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: Nylon66 UL94-V2

Ordering Information

WF2545B-HI XX W 0 X

No. of Pins Color Packing
 02P-17P W= White 0=PE Bag

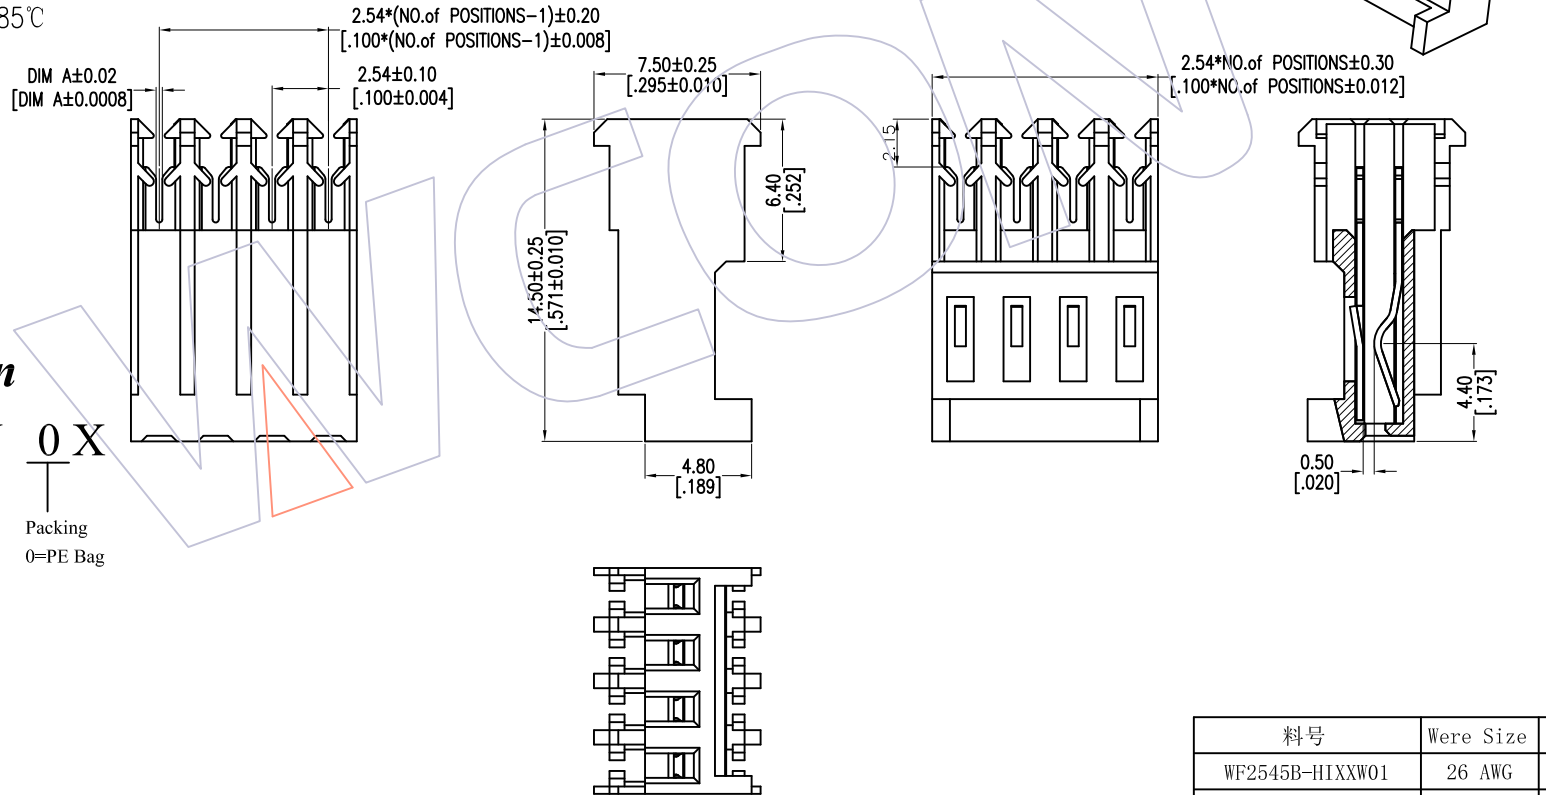

料号	Wire Size	DIM A
WF2545B-HIXXW01	26 AWG	0.28
WF2545B-HIXXW02	24 AWG	0.34
WF2545B-HIXXW03	22 AWG	0.48

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2016.10.20	NEW	-----	x.x ±0.40	DingWenMin	2016.10.20	UNIT mm		WF2545B-HIXXW0X
				x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		2.54mm Wafer CONN, IDC Type
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com