

HSF

NOTES:

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C






Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5242-XX Y P XX X X 01

Two Parts
 Conn+Cover 10 34 S0=Gold Flash/Ni B=Black N=W/O Bump
 14 40 S3=10u"Cold/Ni G=Grey(427C) W=With Bump
 16 50 S4=15u"Cold/Ni
 20 60 S5=30u"Cold/Ni
 24 70 SN=1um
 26 80
 30 100

Item	Pitch	Mating
Standard	1.27X2.54	3140/3141/3240
Alternate		

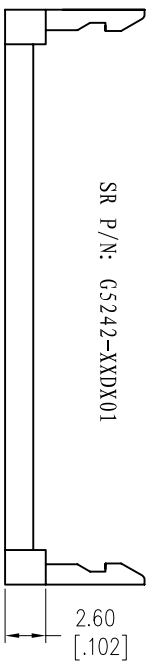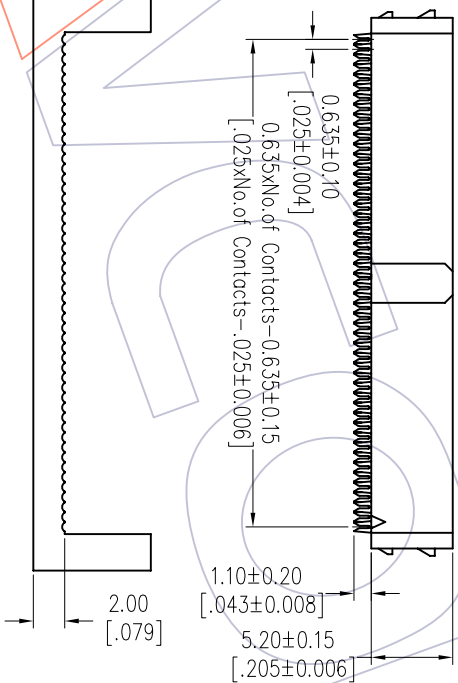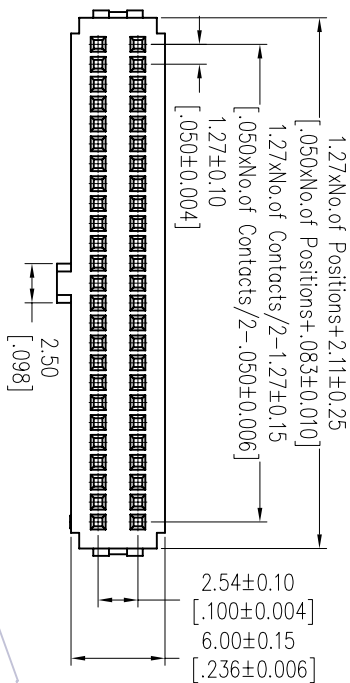

SR P/N: G5242-XXDX01

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuong	2012/10/10	UNIT	mm	5242-XXYPXXXX01
XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	±0.25		1/1	Customer NO.	1.27*2.54 IDC SOCKET+SR
Angle	±0.15		PROJ.		
DIM	± 3'	APPROVE			
TOL		DATE			
CHANGE					

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com