






HSF

NOTES:

Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

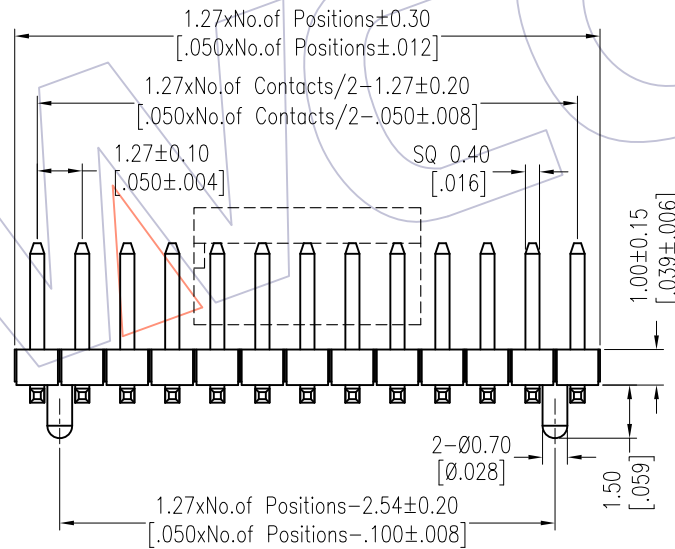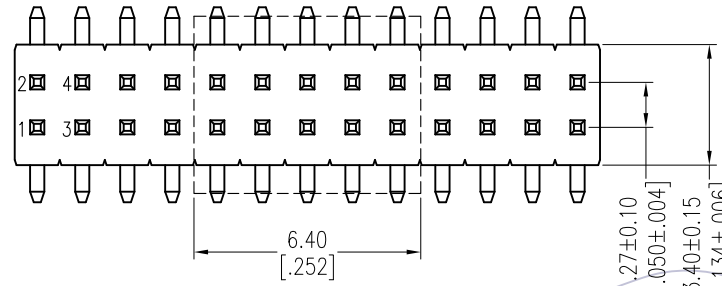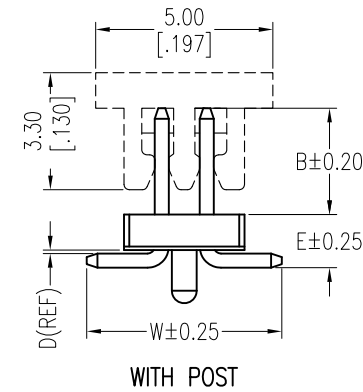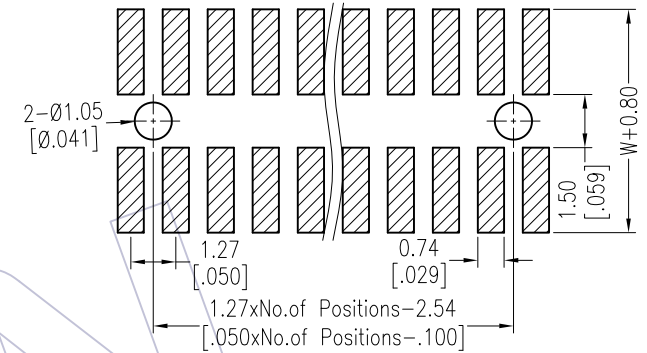

Ordering Information

1310-12 XX XX M XXX C R XX

No.of Pins	Contact Plating	Pin Length	Insulator	Series No.
Per Row:02~50	G0=Gold Flash	L=B+D+1.0+ $\frac{W-1.27}{2}$	C=PA9T	01~99
	G3=10u"Gold	Standard:051=5.1		
	G4=15u"Gold	062=6.2		
	G5=30u"Gold	072=7.2		
	S0=Gold Flash/Tin			
	S3=10u"Gold/Tin			
	S4=15u"Gold/Tin			
	S5=30u"Gold/Tin			
	SN=Tin			
	SM=Matte Tin			

Packing
 A=Tray
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Item	Pin Length	W	E	B	Mating
Standard	5.1	5.50	1.50	1.90	2321
	6.2	5.50	1.50	3.00	2334
	7.2	5.50	1.50	4.00	2344
Alternate					

			OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
			x.X ±0.40	William Chen	2018/01/12	UNIT	mm	1310-12XXXXMXXXCXXX
A1	2018/01/12	MODIFY PART NO.	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/03/13	NEW	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, DUAL ROW, SMT, H=1.0
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.		Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com