



HSF

NOTES:

Rated Current:7.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Sn Over Ni
 Insulator Material:LCP+30%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

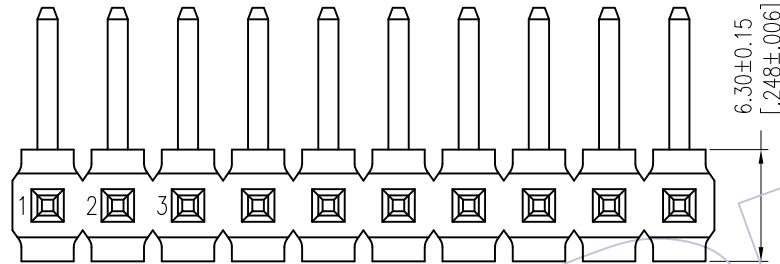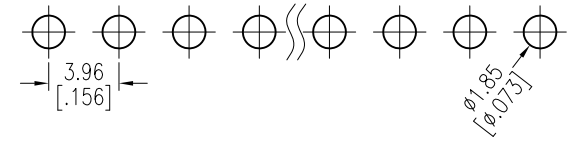

Ordering Information

1832-11 XX XX R XXX D 0 XX

No.of Pins Contact Plating Pin Length Insulator Packing Series No.
 02~20 SN=Tin L=A+B+D+6.3 D=LCP 0=PE Bag 01~99
 SM=Matte Tin Std:235=23.5

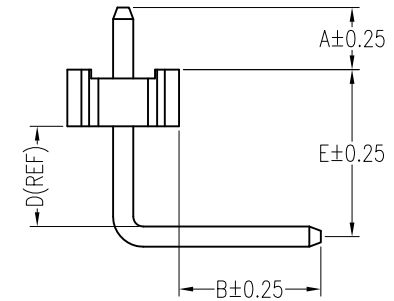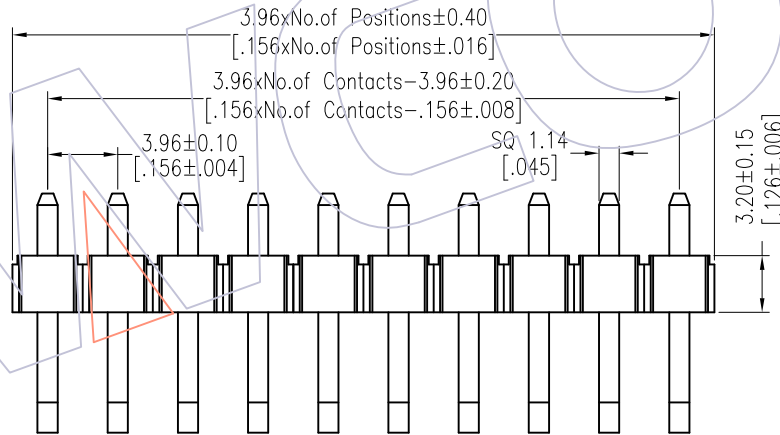

Item	Pin Length	A	E	B	Mating
Standard	23.5	3.50	9.42	8.00	2889
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	Fit	PART NO.
				DIM	TOL					
				x.X	±0.40	William Chen	2018/01/23	UNIT	mm [inch]	1832-11XXXXRXXXDXXX
A1	2018/01/23	MODIFY PART NO.	-----	x.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/06/25	NEW	-----	x.XXX	±0.15	APPROVE	DATE	SHEET	1/1	3.96 Pin Header, SINGLE ROW, R/A, PLANE BENDING, H=3.2
				Angle	± 3'			PROJ.	☉	Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com