



HSF

NOTES:

Rated Voltage:100V AC/DC
 Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:100MΩ min
 Operation Temperature:-25°C to +85°C

Contact Material:Brass
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

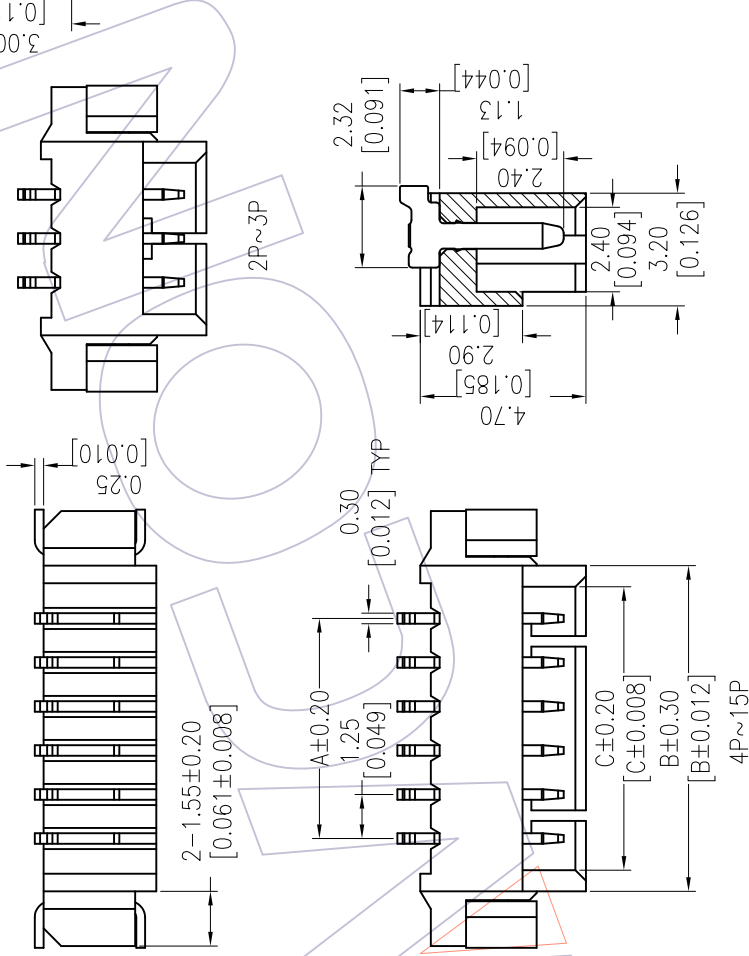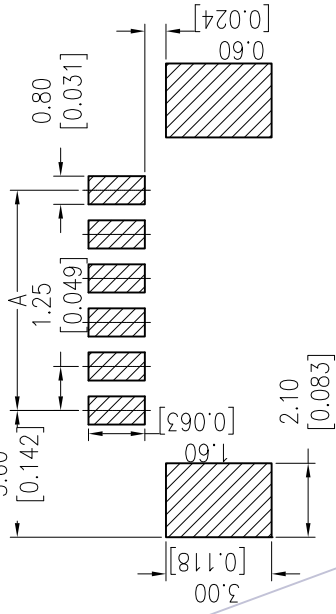

Ordering Information

WF1251 - WZ XX X X I

No.of pins
02~15P

Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin

Color
W=Natural
W=Natural

Packing
A=Tray
T=Tube
R=Reel

Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'ty /Tube
		A	B	C	
02	WF1251-WZ02XX1	1.25	4.25	3.05	75
03	WF1251-WZ03XX1	2.50	5.50	4.30	64
04	WF1251-WZ04XX1	3.75	6.75	5.55	56
05	WF1251-WZ05XX1	5.00	8.00	6.80	50
06	WF1251-WZ06XX1	6.25	9.25	8.05	45
07	WF1251-WZ07XX1	7.50	10.50	9.30	41
08	WF1251-WZ08XX1	8.75	11.75	10.55	37
09	WF1251-WZ09XX1	10.00	13.00	11.80	34
10	WF1251-WZ10XX1	11.25	14.25	13.05	31
11	WF1251-WZ11XX1	12.50	15.50	14.30	30
12	WF1251-WZ12XX1	13.75	16.75	15.55	28
13	WF1251-WZ13XX1	15.00	18.00	16.80	26
14	WF1251-WZ14XX1	16.25	19.25	18.05	25
15	WF1251-WZ15XX1	17.50	20.50	19.30	24

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	ANGLE	SHEET	PROJ.	SHEET	SIZE	UNIT	SCALE	FIT	PART NO.	SEE TAB
A2	2014/07/11	Modify The Color:W=Natural	---	x.x	±0.40	---	---	---	---	---	---	---	---	---	---
A1	2014/03/13	Modify The Material:PA9T--PA6T	---	x.xx	±0.25	---	---	---	---	---	---	---	---	---	---
A0	2012/08/24	NEW	---	x.xxx	±0.15	---	---	---	---	---	---	---	---	---	---
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	ANGLE	SHEET	PROJ.	SHEET	SIZE	UNIT	SCALE	FIT	PART NO.	SEE TAB

WCON

Http: www.wcon.com
 WCON-Dongguan
 WCON-Kunshan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

TITLE:
 "M" TYPE 1.25 Wafer 90° SMT
 Customer NO.