
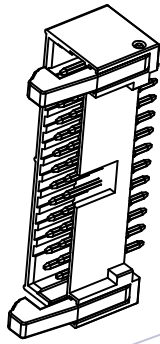


HSF


NOTES:

- Rated Current:3.0AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-40°C to +105°C
- Housing Material:PA9T+30%GF(UL94V-0)
- Latch Material:PA9T+30%GF(UL94V-0)
- Contact Material:Brass
- Contact plating:Au or Sn over Ni Plated
- Fixed Axle Material:Brass
- Fixed Axle plating:Ni Plated

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)




3D VIEW(REF.)
SCALE 1:2

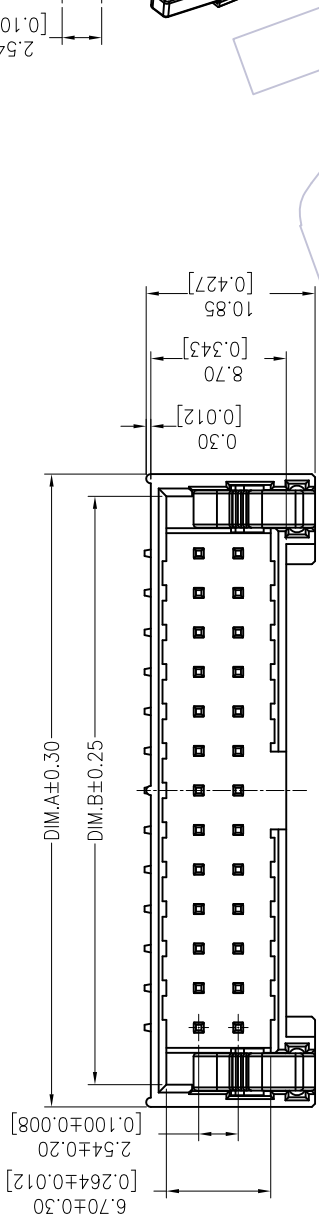

Ordering Information

3212 - XX S XX B X X I

- No. of Pins: 10, 34, 14, 40, 16, 50, 20, 60, 26, 64, 30
- Contact Plating: B=Black, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin
- Insulator Color: B=Black
- Latch Type: L=Long Latch, S=Short Latch
- Packing: T=Tube, A=Tray

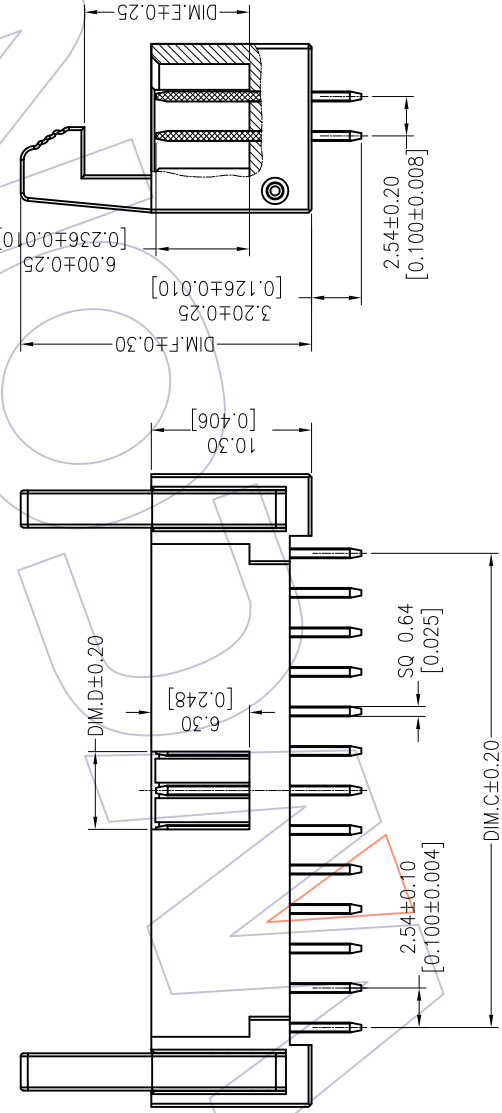

PART NO.	DIM E	DIM F	DIM F
3212-XXXXBLX1	14.60	22.10	
3212-XXXXBSX1	10.60	18.70	

No. Of POSITION	DIM.A	DIM.B	DIM.C	DIM.D
6	15.28	12.42	5.08	2.30
8	17.82	14.96	7.62	2.30
10	20.36	17.50	10.16	5.00
12	22.90	20.04	12.70	5.00
14	25.44	22.58	15.24	5.00
16	27.98	25.12	17.78	5.00
20	33.06	30.20	22.86	5.00
24	38.14	35.28	27.94	5.00
26	40.68	37.82	30.48	5.00
30	45.76	42.90	35.56	5.00
34	50.84	47.98	40.64	5.00
40	58.46	55.60	48.26	5.00
50	71.16	68.30	60.96	5.00
60	83.86	81.00	73.66	5.00
64	88.94	86.08	78.74	5.00

REV	DATE	2013/10/24	MODIFICATION DESCRIPTION	NEW
OPERATION	X.X	±0.40	OPERATION	±0.15
CHECK	X.XX	±0.25	CHECK	±0.15
APPROVE	X.XXX	±0.15	APPROVE	±0.15
SCALE	mm	inch	SCALE	mm
UNIT	A4	1/1	UNIT	inch
SHEET	1/1	Customer NO.	SHEET	1/1
PROJ.	3212-XXXXBXX1	Customer NO.	PROJ.	3212-XXXXBXX1
DATE	2013/10/24	DATE	DATE	2013/10/24
Tsingsn	DATE	DATE	Tsingsn	DATE
PART NO.	3212-XXXXBXX1	TITLE:	PART NO.	3212-XXXXBXX1
EJECTOR HEADER		TITLE:		2.54mm EJECTOR HEADER
180° DIP TYPE		TITLE:		180° DIP TYPE
Customer NO.		TITLE:		Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com

A B C D E F G H

1 2 3 4 5 6 7 8 9 10